

Quick Start Guide


ZYXEL ENGLISH

VMG3625-T20A


Dual-Band Wireless AC/N Combo
WAN Gigabit Gateway with USB

- EN ① Connect the power cable and press the power button.
② Connect a computer using the yellow Ethernet cable.

Hardware Connections

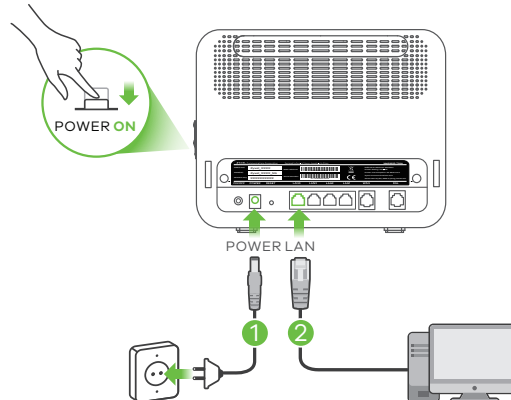


- EN ③ Connect a broadband modem or router (3-a) using an Ethernet cable. OR Connect a DSL splitter (3-b) or directly to the telephone wall outlet using the gray telephone cable.
④ Connect a 3G dongle (optional).

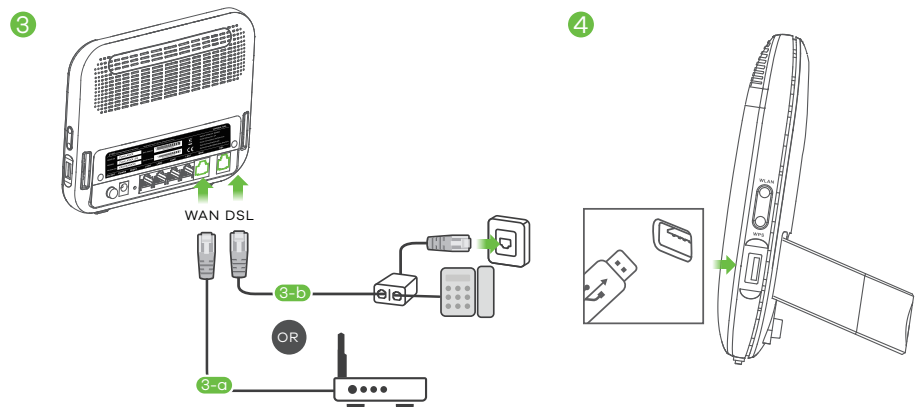

- EN ⑤ **INTERNET LED**
ON - The Internet connection is ready. Go to Wireless Setup.
OFF - The Internet connection is not ready. Go to Internet Setup.

Check the LEDs

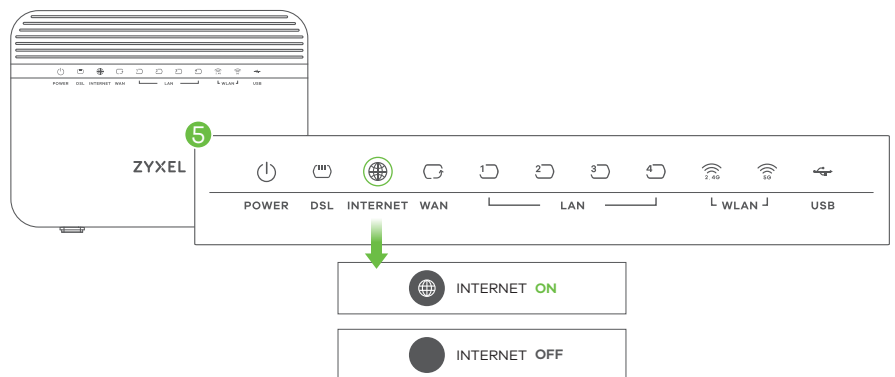


- EN ⑥-1 Open a web browser and go to <http://192.168.1.1>. Enter the default **User Name (admin)** and **Password (1234)**, and then click **Login**.
⑥-2 A wizard runs. Follow the wizard prompts.


Internet Setup

6-1

- <http://192.168.1.1>
 User Name : admin
Password : 1234 (default)

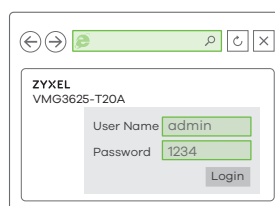

6-2

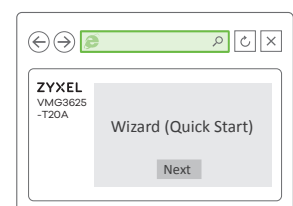

Quick Start Guide

ZYXEL ENGLISH

VMG3625-T20A

Dual-Band Wireless AC/N Combo
WAN Gigabit Gateway with USB


WPS

- 1 Press the WPS button until the WiFi 2.4G and 5G LEDs light up in orange.
- 2 Press the WPS button on the client. If the WPS method fails, perform the No WPS method.


No WPS

- 1 The SSID and Wireless key are on the device sticker.
- 2 Find the device with this SSID. Enter the Wireless key to connect.

Wireless Setup / WPS

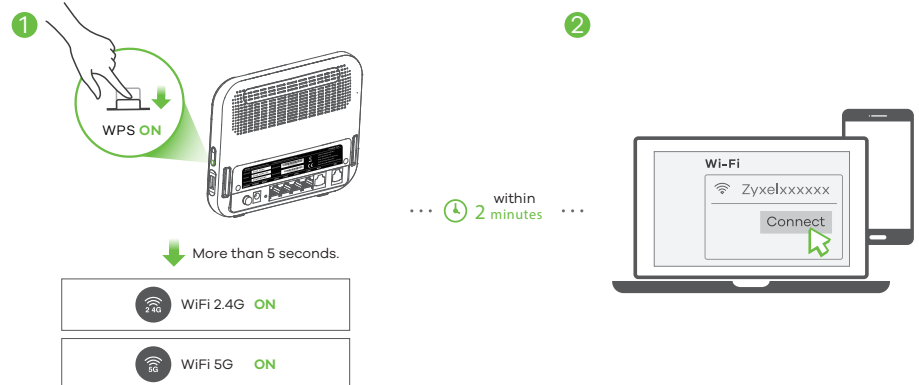


Wireless Setup / NO WPS

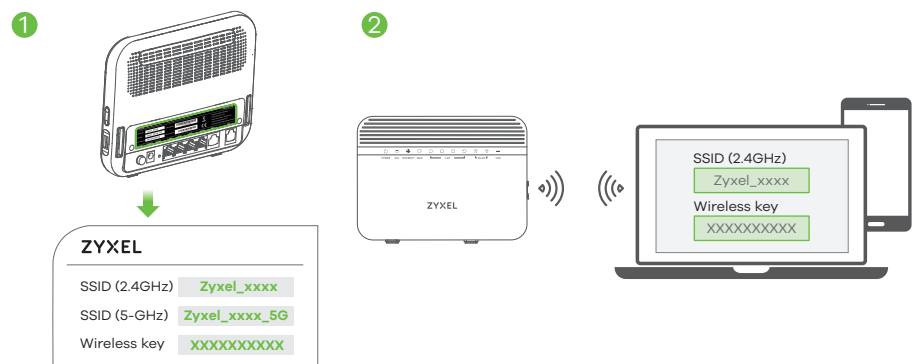

- 1 Connect the stand with the bracket holes facing up.
- 2 Place the device vertically on a smooth level surface.

Desktop Installation

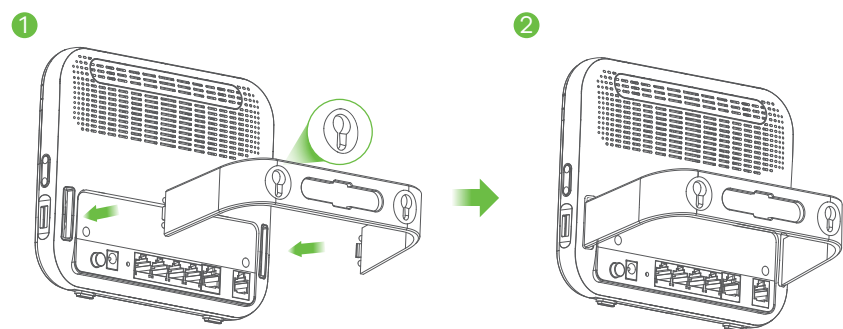

- 1 Drill two holes at the distance of 104.9mm apart. Insert screw anchors and screws (not provided) into the holes.
- 2 Attach the bracket to your VMG3625-T20A with the bracket holes facing down.
- 3 Hang it on the screws.

Wall Mounting

