

PATH TO THE FUTURE




Selling Points

- Изогнутый экран: кривизна 1000R идеально соответствует анатомии человека и снижает усталость глаз
- Отличные скоростные характеристики: высокая частота обновления экрана (165 Гц) и низкое время отклика (1 мс) станут серьезным преимуществом в динамичных играх
- Режим Night Vision: «ночное зрение» для улучшенной ориентации в темных игровых сценах.
- Технология адаптивной синхронизации: повышенное качество отображения динамичных игровых сцен.
- Комфорт для пользователя: подавление мерцания экрана и снижение интенсивности синего света.
- Безрамочный корпус: идеально для мультимониторных конфигураций.
- Широкие углы обзора: 178°.



Picture and logos

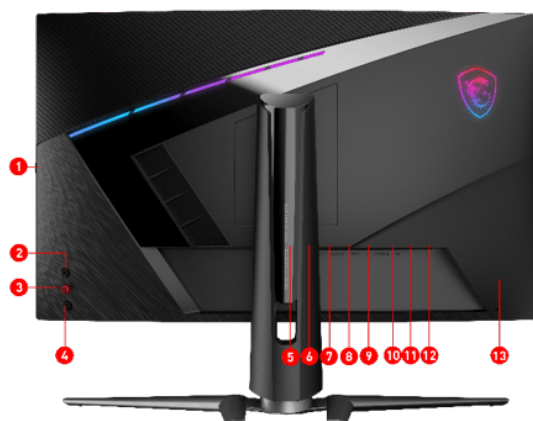

1. Headset Hanger
2. Marco Key
3. 5-Way joystick navigator
4. Power Jack
5. 1x Display Port (1.2a)
6. 1x HDMI w/CEC (2.0b)
7. 1x HDMI (2.0b)
8. 1x USB2.0 Type C
9. 1x Earphone out
10. 1x USB2.0 Type B Upstream Port
11. 2x USB 2.0 Type A
12. Kensington Lock



М О Н И Т О Р Ы

MPG ARTYMIS 273CQR

М P G А R T Y M I S 2 7 3 C Q R

Specification

Color	ID1/Black-Black
Entity MKT Name	MPG ARTYMIS 273CQR
Screen Size	27" (69 cm)
Active Display Area (mm)	596.736 (H) x 335.664 (V)
Curvature	Curve 1000R
Panel Type	VA
Resolution	2560x1440 (WQHD)
Aspect Ratio	16:9
Dynamic Refresh Rate technology	FreeSync Premium
HDR (High dynamic range)	HDR 400
SDR Brightness (nits)	550
Contrast Ratio	3000:1
DCR (Dynamic Contrast Ratio)	100000000:1
Signal Frequency	69.8~212.4 KHz(H) / 48~165 Hz(V)
Refresh Rate	165HZ
Response Time (MPRT)	1ms(MPRT)
Response Time (GTG)	4ms
Response Time (Tr + Tf)	12ms
View Angles	178°(H)/178°(V)
NTSC (CIE1976 area percentageoverlap)	97.21%/86.18%
NTSC (CIE1931 area percentageoverlap)	84.17%/79.72%
sRGB (CIE1976 area percentageoverlap)	111.49%/96.56%
sRGB (CIE1931 area percentageoverlap)	118.84%/99.04%
Adobe RGB (CIE1976 area percentageoverlap)	95.54%/88.32%
Adobe RGB (CIE1931 area percentageoverlap)	88.08%/83.14%
DCI-P3 (CIE1976 area percentageoverlap)	88.79%/88.71%
DCI-P3 (CIE1931 area percentageoverlap)	87.61%/87.57%
Rec.709 (CIE1976 area percentageoverlap)	111.49%/96.56%
Rec.709 (CIE1931 area percentageoverlap)	118.84%/99.04%
Surface Treatment	Anti-glare
Display Colors	1.07B
Color bit	10 bits (8 bits + FRC)
Note_DP	2560 x1440 (Up to 165Hz)
Note_HDMI	2560 x 1440 (Up to 144Hz)
Note_DVI	N/A
HDMI	2
HDMI version	2.0b
HDMI HDCP version	2.2
DisplayPort	1
DisplayPort version	1.2a
DisplayPort HDCP version	2.2
Thunderbolt version	NA
Thunderbolt HDCP version	NA
USB Type C (DisplayPort Alternate)	1
DVI	NA
D-Sub	NA
Mic-in	NA
Mic-in upstream	NA
Headphone-out	1
Audio Combo	NA
USB 2.0 Type B	1
USB 3.2 Gen 1 Type B	NA
Lock type	Kensington Lock
Power Type	External Adaptor 20V 4.5A
Power Input	100~240V, 50/60Hz
Adapter's KC safety Number	SU10469-16001
Power Cord Type	C5
QC Output	NA
QC Output Power	NA
PD Output	NA
PD Output Power	15W
Adjustment (Tilt)	-5° ~ 20°
Adjustment (Swivel)	-30° ~ 30°



М О Н И Т О Р Ы

MPG ARTYMIS 273CQR

MPG ARTYMIS 273CQR

Adjustment (Height)	0 ~ 100 mm
Adjustment (Pivot)	NA
VESA Mounting	100x100mm
Frameless Design	Yes
Outer Carton Dimension (WxDxH) (mm)	790 x 238 x 515
Outer Carton Dimension (WxDxH) (inch)	31.1 x 9.37 x 20.28
Product Dimension with Stand (WxDxH) (mm)	607.08 x 260.88 x 527.81
Product Dimension with Stand (WxDxH) (inch)	23.9 x 10.27 x 20.78
Product Dimension without Stand (WxDxH) (mm)	607.08 x 122.64 x 372.21
Product Dimension without Stand (WxDxH) (inch)	23.9 x 4.83 x 14.65
Thunderbolt	NA
USB 2.0 Type A	2
USB 2.0 Type C	NA
USB 3.2 Gen 1 Type A	NA
USB 3.2 Gen 1 Type C	NA
USB 3.2 Gen 2x2 Type C	NA
USB 3.2 Gen 2x2 Type A	NA
Card Reader	NA
Stand Dimension (WxDxH) (mm)	633.4 x 317.9 x 393.25
Stand Dimension (WxDxH) (inch)	24.94 x 12.52 x 15.48
Inside Carton Dimension (WxDxH) (mm)	775 x 223 x 490
Inside Carton Dimension (WxDxH) (inch)	30.51 x 8.78 x 19.29
Weight (Net kg)	6.7
Weight (Gross kg)	9.6
DisplayPort Cable	1
HDMI Cable	1
DVI Cable	0
USB Type A to Type B Cable	1
USB Type C to Type A Cable	0
USB Type C to Type C Cable	1
Thunderbolt Cable	0
VGA Cable	0
3.5mm audio Cable	0
3.5mm combo audio Cable	0
Warranty	12M
Power Cord	1
AC Adaptor	1
Quick Guide	1
Warranty Card	1
EAN	4719072800116