



# Ruijie RG-WLAN Series Access Points

## AP\_RGOS 11.9(6)W1B1

### Web-based Configuration Guide

## Copyright

Copyright © 2023 Ruijie Networks

All rights are reserved in this document and this statement.

Any reproduction, excerpt, backup, modification, transmission, translation or commercial use of this document or any portion of this document, in any form or by any means, without the prior written consent of Ruijie Networks is prohibited.

Trademarks including  and  are owned by Ruijie Networks.

All other trademarks or registered trademarks mentioned in this document are owned by their respective owners.

## Disclaimer

The products, services, or features you purchase are subject to commercial contracts and terms. Some or all of the products, services or features described in this document may not be within the scope of your purchase or use. Unless otherwise agreed in the contract, Ruijie Networks does not make any express or implied statement or guarantee for the content of this document.

Due to product version upgrades or other reasons, the content of this document will be updated from time to time. Ruijie Networks reserves the right to modify the content of the document without any notice or prompt.

This manual is for reference only. Ruijie Networks endeavors to ensure content accuracy and will not shoulder any responsibility for losses and damages caused due to content omissions, inaccuracies or errors.

# Preface

## Intended Audience

This document is intended for:

- Network engineers
- Technical support and servicing engineers
- Network administrators

## Technical Support

- Ruijie Networks Website: <https://www.ruijienetworks.com/>
- Technical Support Website: <https://ruijienetworks.com/support>
- Case Portal: <https://caseportal.ruijienetworks.com>
- Community: <https://community.ruijienetworks.com>
- Technical Support Email: [service\\_rj@ruijienetworks.com](mailto:service_rj@ruijienetworks.com)
- Live Chat: <https://www.ruijienetworks.com/rita>

## Conventions

### 1. Signs

The signs used in this document are described as follows:

---

#### **Warning**

An alert that calls attention to important rules and information that if not understood or followed can result in data loss or equipment damage.

---

---

#### **Caution**

An alert that calls attention to essential information that if not understood or followed can result in function failure or performance degradation.

---

---

#### **Note**

An alert that contains additional or supplementary information that if not understood or followed will not lead to serious consequences.

---

---

#### **Specification**

An alert that contains a description of product or version support.

---

# Contents

|                                                                      |    |
|----------------------------------------------------------------------|----|
| Preface .....                                                        | I  |
| 1 Web-based Configuration .....                                      | 1  |
| 1.1 Overview .....                                                   | 1  |
| 1.2 Application .....                                                | 1  |
| 1.2.1 Web-based Management .....                                     | 1  |
| 1.3 Web Configuration .....                                          | 3  |
| 1.3.1 Config Wizard .....                                            | 3  |
| 1.3.2 Monitor .....                                                  | 6  |
| 1.3.3 Configuration .....                                            | 8  |
| 1.3.4 Diagnosis .....                                                | 60 |
| 1.3.5 Maintenance .....                                              | 64 |
| 1.3.6 Others .....                                                   | 72 |
| 1.4 Fit AP-Eweb .....                                                | 74 |
| 1.4.1 SmartAP .....                                                  | 74 |
| 1.5 Enabling the Web Server .....                                    | 75 |
| 1.6 Configuration Examples .....                                     | 78 |
| 1.6.1 Constructing a WLAN for the DHCP Server on the AP Device ..... | 78 |

# 1 Web-based Configuration

## 1.1 Overview

A user accesses the Web-based management system using a browser such as Internet Explorer (IE) to manage the AP device.

Web-based management involves two parts: Web server and Web client. A Web server is integrated into a device to receive and process requests sent from a client (for example, read a Web file or execute a command request) and returns the processing results to the client. Generally, a Web client refers to a Web browser.

✓ Currently, this file is applicable to only AP devices.

## 1.2 Application


| Application          | Description                                                                             |
|----------------------|-----------------------------------------------------------------------------------------|
| Web-based Management | After configuring, a user can access the Web-based management system through a browser. |

### 1.2.1 Web-based Management

#### Scenario

As shown in the following figure, an administrator can access a device through a browser on a PC to manage the device.

Figure 1-1

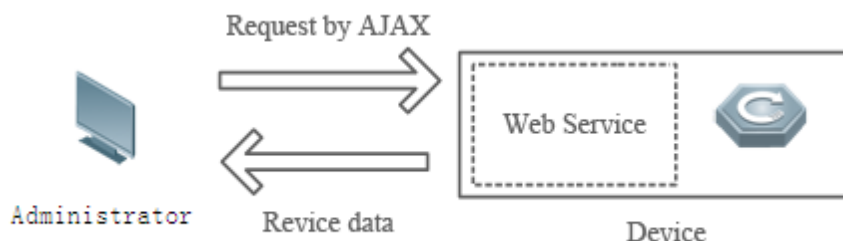

|             |                                                                                                                                                                                                            |
|-------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Note</b> | The Web management system integrates configuration commands and sends them to the device through AJAX requests.<br>Web service is enabled on the device to process HTTP requests to return requested data. |
|-------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

#### Function Deployment

## Configuration Environment Requirements

### Requirements for Client

- An administrator logs in to the Web-based management system using the Web browser on a client to manage the device. Generally, a client refers to a PC. It may also be other mobile terminal devices, for example, a laptop.
- Google Chrome is recommended, and Internet Explorer 11 and 360 Browser are supported. Exceptions such as messy code and format errors may occur when other browsers are used.
- Resolution: It is recommended that the resolution be set to 1024 x 768, 1280 x 1024, or 1440 x 960. Exceptions such as font alignment error and format error may occur when other resolutions are selected.

### Requirements for server

- The Web service must be enabled for the AP device.
- Login authentication information for Web-based management must be configured for the AP device.
- A management IP address must be configured for the AP device.

## Default Configuration

The following table lists the Web management system default configuration.

| Feature       | Default Settings |
|---------------|------------------|
| Web service   | Enabled          |
| Management IP | 192.168.110.1    |


| Default Username/Password | Permission Description                    |
|---------------------------|-------------------------------------------|
| admin/admin               | Super administrator with all permissions. |

 The default password is not saved in **show running-config**.

## Login

Type **http://X.X.X.X** (management IP address), default: <http://192.168.110.1>, in the address bar of a browser and press **Enter** to access the login page, as shown in the following figure.

Figure 1-2 Login page

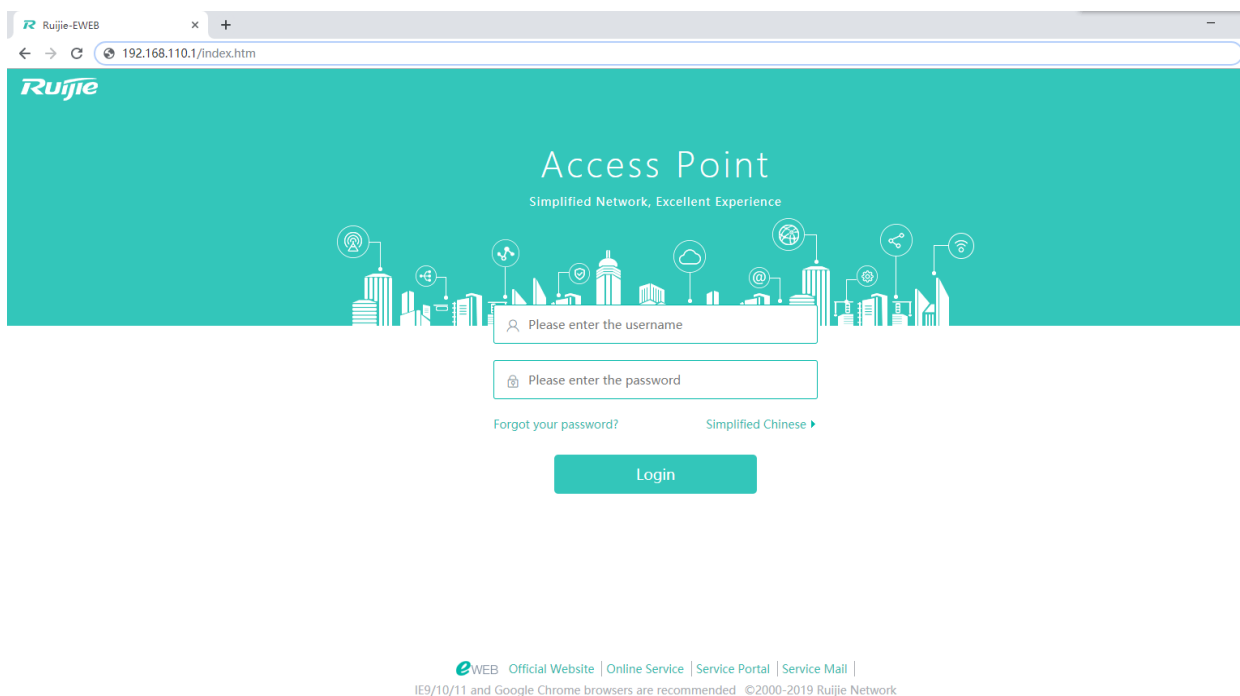

After typing the username and password, click **Login**.

Enter the username and password. Click **Login** to access the Web management system.


Click **Online Service** for configuration help.

If you enter the wrong username or password for five consecutive times, your account will be locked for 10 minutes.

## 1.3 Web Configuration


### 1.3.1 Config Wizard

Build a Wi-Fi network for STAs to access for Internet services.

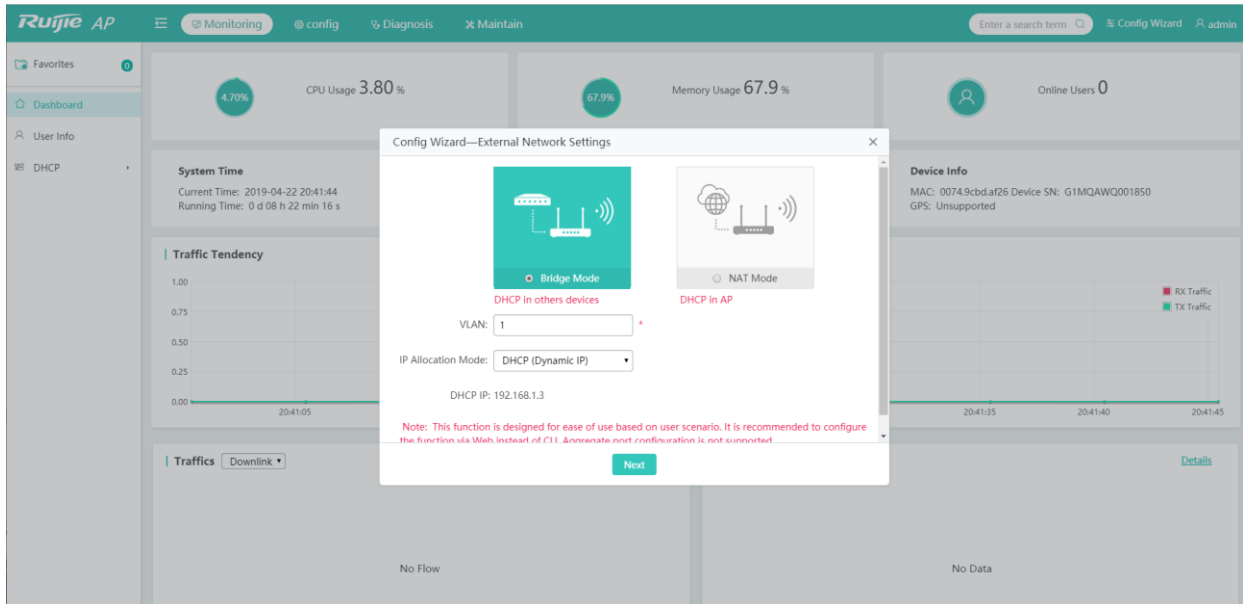


- 1) The **Config Wizard** page is displayed after successfully logging in to the Web if the device is in the default factory setting state, as shown in the preceding figure.
- 2) The **Config Wizard** page is also displayed when you click the **Config Wizard** link in the upper-right corner on the homepage.

The device supporting NAT can work in Bridge mode or NAT mode.

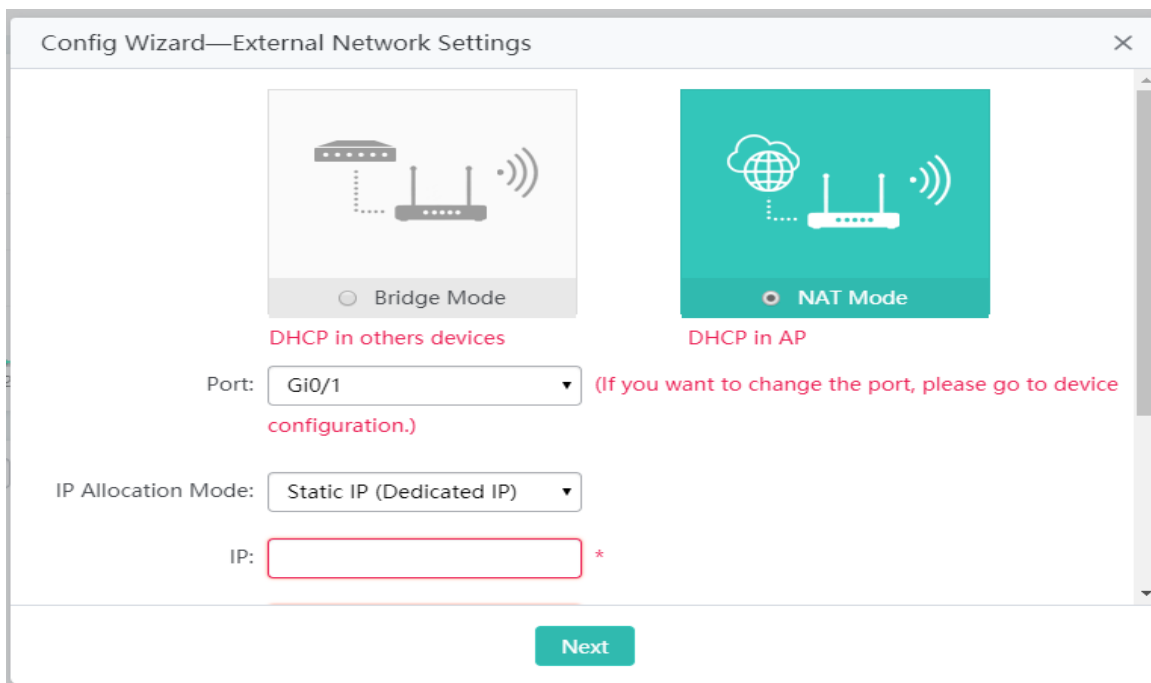


A device not supporting NAT can work only in Bridge Mode.

Config Wizard—External Network Settings



☒ Bridge Mode

DHCP in others devices



☐ NAT Mode

DHCP in AP

VLAN:  \*

IP Allocation Mode: 

DHCP (Dynamic IP)

DHCP IP: 192.168.2.47

Note: This function is designed for ease of use based on user scenario. It is recommended to configure the function via Web instead of CLI. Aggregate port configuration is not supported.

Next

Config Wizard—WiFi

SSID:  \*

WiFi Password:  ☐ Show Password

DHCP: ☒ Enable (IP addresses are allocated by AP)

VLAN ID:

IP Range:   to

DHCP Gateway:

Preferred DNS Server:  Optional

Secondary DNS Server:  Optional

Finish

Back

Configure the Wi-Fi parameters, and click **Finish** to finish the configuration.

After the AP device is initialized, please configure the AP device through the **Config Wizard** page.


5

-  All quick settings are scenario-based settings. And some of the configuration is delivered by default. If configurations such as NAT, interface, or address pool are changed via CLI or MACC system, it is recommended to not change the configuration again via Quick Settings, otherwise there could be incompatibility.
-  If the AP device is in access mode, it is recommended to build the gateway and address pool on the other device. If the AP device is in routing mode, it is recommended to build the gateway and address pool on the AP device and configure the NAT for it.

## 1.3.2 Monitor

### 1.3.2.1 Dashboard

The dashboard enables viewing basic information for the AP device, including the device MAC address, device model, system alarm information, flow trends of AP device ports, latest trends of all management APs, and STA information corresponding to each management AP. In addition, it enables you to know the distribution condition of STA signal strength in real time.

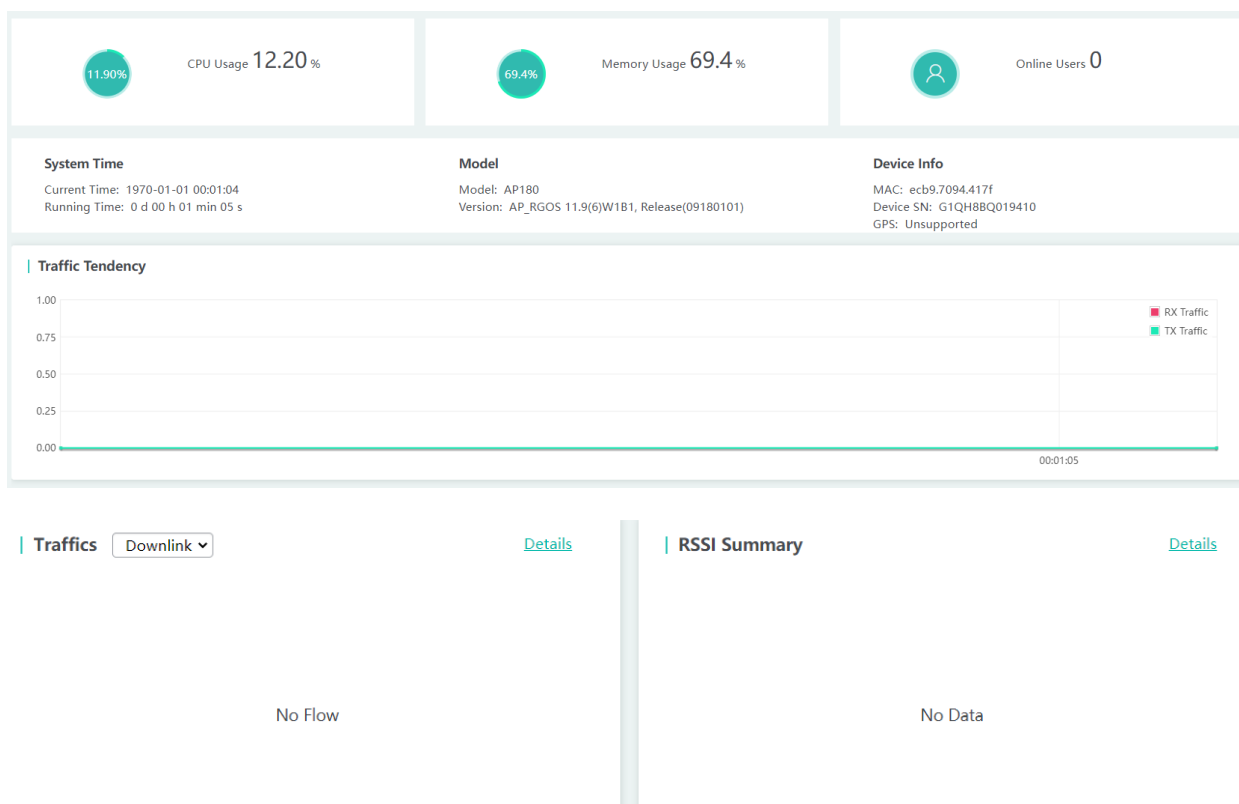

Click the **Traffic > Details** or **RSSI Summary > Details** link in the lower left corner to view the STA details on the displayed page, for example, the MAC address and RSSI.

### 1.3.2.2 User Info

User information is displayed here.

Note: If you want to delete STAs from blacklist or whitelist, please go to [Blacklist/Whitelist](#).

Refresh

Blacklist

Whitelist

MAC-based: 

Search

| <div></div>   | STA | MAC | IP | Uptime | Speed(Kbps) | RSSI | Channel(Radio) | Network | Action |
|---------------|-----|-----|----|--------|-------------|------|----------------|---------|--------|
| No Data Found |     |     |    |        |             |      |                |         |        |

Show No.: 

10

 Total Count:0

< First

< Pre

Next >

Last >

1

GO

1.3.2.3 DHCP

DHCP includes DHCP client list and DHCP server status.

1.3.2.3.1 DHCP Client List

DHCP clients are displayed here.

IP-based 

Search

| <div></div> | IP           | MAC            | Lease Time                       | Allocation Type    | Action            |
|-------------|--------------|----------------|----------------------------------|--------------------|-------------------|
| <div></div> | 192.168.23.3 | 14bd.61a9.79c2 | 0 Day(s) 23 hour(s) 44 minute(s) | Dynamic Allocation | <div>Delete</div> |

Show No.: 

10

 Total Count:1

< First

< Pre

1

Next >

Last >

1

GO

1.3.2.3.2 DHCP Server Status

DHCP server status and address pool usage are displayed here.

DHCP Server Status: On Config DHCP

**IPv4 DHCP** Name:  Search

| Name          | Usage                                    | IP Address Range           | Lease Time | DNS             | Default Gateway |
|---------------|------------------------------------------|----------------------------|------------|-----------------|-----------------|
| macc_sta_pool | <div><div></div></div> 0.40% ( 1 / 253 ) | 192.168.23.0/255.255.255.0 | 1 Day(s)   | 114.114.114.114 | 192.168.23.1    |
| test_sta      | <div><div></div></div> 0.00% ( 0 / 253 ) | 192.168.2.0/255.255.255.0  | 8 hour(s)  |                 | 192.168.2.1     |

Show No.: 5 Total Count:2 ⏪ First < Pre 1 Next > Last ⏩ 1 GO

---

**IPv6 DHCP** Name:  Search

| Name          | IP Address Range | Lease Time | DNS |
|---------------|------------------|------------|-----|
| No Data Found |                  |            |     |

Show No.: 5 Total Count:0 ⏪ First < Pre Next > Last ⏩ 1 GO

### 1.3.3 Configuration

#### 1.3.3.1 Wi-Fi/WLAN

A Wireless Local Area Network (WLAN) refers to a network system that allows different PCs to communicate and share resources with each other by interconnecting different PCs through wireless communication technologies. The essence of a WLAN is that PCs are interconnected with each other in wireless rather than wired mode, thus constructing a network and allowing terminals to move more flexibly.

Wi-Fi or Wi-Fi is a technology for wireless local area networking with devices based on the IEEE 802.11 standards. Devices that can use Wi-Fi technology include personal computers, video-game consoles, smartphones, digital cameras, tablet computers, smart TVs, digital audio players and modern printers. Wi-Fi compatible devices can connect to the Internet via a WLAN and a wireless access point. Such an access point (or hotspot) has a range of about 20 meters (66 feet) indoors and a greater range outdoors. Hotspot coverage can be as small as a single room with walls that block radio waves, or as large as many square kilometers achieved by using multiple overlapping access points.

Service Set Identifier (SSID), also referred to as ESSID: It is used to distinguish different networks, that is, identifying an ESS. An SSID contains a maximum of 32 characters. A WNIC configured with different SSIDs can access different networks. SSIDs are usually broadcasted by an AP or a wireless router. The scanning function delivered with the XP can be used to view SSIDs within the current area. In consideration of security, SSIDs may not be broadcasted. In this case, users need to manually set SSIDs to access corresponding networks. To be simple, an SSID is the name of a WLAN. Only computers with the same SSID can communicate with each other.

The WLAN allows wireless STAs to access the AP through Wi-Fi for Internet services. Multiple WLANs can be added or deleted.

The following figure shows the page for adding a WLAN.

WiFi-1 × + ▼

**Note:** This function is designed for ease of use based on user scenario. It is recommended to configure the function via Web instead of CLI.

WLAN ID:  \* Range: 1-8

SSID:

Encryption Type: WPA/WPA2-PSK ▼

WiFi Password:  \* ☐ Show Password

[» Advanced Settings](#)

Save

- Adding Wi-Fi/WLAN

WiFi-1 × WiFi-2 × + ▼

**Note:** This function is designed for ease of use based on user scenario. It is recommended to configure the function via Web instead of CLI.

WLAN ID:  \* Range: 1-8

SSID:

Encryption Type: WPA/WPA2-PSK ▼

WiFi Password:  \* ☐ Show Password

[» Advanced Settings](#)

Save

- 1) Click +, and a new panel for Wi-Fi configuration is displayed.
- 2) Set the Wi-Fi parameters.
- 3) Click **Save** to finish the configuration.

- Editing Wi-Fi/WLAN

WiFi-1 × WiFi-2 × + ▾

**Note:** This function is designed for ease of use based on user scenario. It is recommended to configure the function via Web instead of CLI.

WLAN ID:  \* Range: 1-8

SSID:  \*

Encryption Type:  ▾

WiFi Password:  \* ☐ Show Password

» Advanced Settings

Save

- 1) Click the Wi-Fi panel you want to edit.
- 2) Edit the Wi-Fi configuration.
- 3) Click **Save**. The **Edit succeeded** message is displayed.

#### WLAN ID

WLAN ID is used to identify a WLAN network.

#### SSID

An SSID is the name of a wireless local area network.

#### Encryption Type

Open: No password is required.

WPA/WPA2-PSK: This encryption type is secure and simple, often used in homes and small offices.

WPA/WPA2-802.1x: An authentication server is required. This encryption type is complicated and costs much, not recommended for common users.

#### Advanced Settings

##### Hide SSID

This function is disabled by default.

##### SSID Code

UTF-8: Most terminals support UTF-8. The default code is UTF-8.

GBK: Some terminals and PCs support GBK.

##### WiFi Type

Radio1 is a 2.4GHz network and Radio2 is a 5GHz network.

### Rate Limiting

The device only supports rate limiting on each user currently.

wlan-qos wlan-based \* per-user-limit up-streams average-data-rate \*\* burst-data-rate \*\*

wlan-qos wlan-based \* per-user-limit down-streams average-data-rate \*\* burst-data-rate \*\*

### 5G-prior Access

This feature will be displayed if supported by the device.

- Deleting Wi-Fi/WLAN

WiFi-1 × WiFi-2 × + ▾

**Note:** This function is designed for ease of use based on user scenario. It is recommended to configure the function via Web instead of CLI.

WLAN ID:  \* Range: 1-8

SSID:  \*

Encryption Type:  ▾

WiFi Password:  \* ☐ Show Password

» Advanced Settings

Save

- 1) Click the Wi-Fi panel you want to delete a Wi-Fi.
- 2) Click .
- 3) Click **OK** in the dialog box displayed to finish the deletion operation.

## 1.3.3.2 AP

### 1.3.3.2.1 Radio Settings

Wireless channels transmit RF medium between APs and wireless STAs. The use of channels varies with different countries and frequency bands. For example, the 2.4 GHz frequency band can be configured with 13 channels (channel 1 to channel 13), and the 5 GHz frequency band can be configured with five channels (channels 149, 153, 157, 161, and 165). The overlapping channels in the 2.4 GHz frequency band generate interference. It is recommended that these channels be configured as non-overlapping channels (for example, channels 1, 6, and 11) to avoid radio signal collision. The five channels in the 5 GHz frequency band do not overlap or generate interference.

Wireless channel settings are mainly about adjusting the strength of the Wi-Fi signal sent out by the device. Channel parameters can be set for the 2.4G and 5G networks.

- Enabling the 2.4G Network

**Note:** If the signal is unstable or poor, please modify the following parameters.

**Note:** Take the following factors into consideration: antenna installation, signal interference, magnetic fields, and walls.

2.4G Network: ☒

[Force switching from 2.4GHz to 5GHz Network]

Country or Region:

Radio Protocol:

Radio Channel:  *Current Channel: 1*

RF Bandwidth:

Power:  ?

STA Limit:  (Range: 1 - 512 )

1) Click ☒ to enable or disable the 2.4G network.

- Enabling the 5G Network

5G Network: ☒

Country or Region:

Radio Protocol:

Radio Channel:  *Current Channel: 149*

RF Bandwidth:

Power:  ?

STA Limit:  (Range: 1- 512 )

Save

1) Click  to enable or disable the 5G network.

- Country & Region

The country or region of the current radio.

#### Radio Protocol

2.4G Network: (1) 11bgn indicates the set of 802.11b, 802.11g and 802.11n. (2) 11bgn+11ax indicates the set of 802.11b, 802.11g, 802.11n and 802.11ax.

5G Network: (1) 11an indicates the set of 802.11a and 802.11n. (2) 11an+11ac indicates the set of 802.11a, 802.11n, 802.11ac. (3) 11an+11ac+11ax indicates the set of 802.11a, 802.11n, 802.11ac and 802.11ax.

#### Radio Channel

The channel of the current radio.

#### RF Bandwidth

The channel width of the current radio, including 20 Mhz and 40 Mhz.

#### Power

The power of the current radio. **Power Saving**, **Standard** and **Enhanced** indicate 30, 80 and 100 respectively.

#### STA Limit

The number of clients associated to the current radio.

### 1.3.3.2.2 iBeacon

iBeacon uses Bluetooth low energy proximity sensing to transmit a universally unique identifier picked up by a compatible app or operating system. The identifier and several bytes sent with it can be used to determine the device's physical location, track customers, or trigger a location-based action on the device such as a check-in on social media or a push notification.

iBeacon signals are broadcast over Bluetooth, and mainly applied to WeChat Shake.



If iBeacon is not displayed in the menu, this function is not supported.

- If the AP does not support Bluetooth radio, the following page will be displayed.

**Note:** iBeacon is the name for Apple's technology standard. The underlying communication technology is Bluetooth Low Energy. It allows Mobile Apps (running on both iOS and Android devices) to listen for signals from beacons in the physical world and react accordingly.  
**Example:** After this solution is applied in the mall, users will get AD push via WeChat Shake. The following data is provided by the third party (mall). [?](#)

UUID:  [?](#)

Major:  *Range: 0 - 65535*

Minor:  *Range: 0 - 65535*

[Save](#)

- If the AP supports Bluetooth radio, the following page will be displayed. You can configure iBeacon globally or based on radio. Radio-based iBeacon settings prevail over global iBeacon settings.

**Note:** iBeacon is the name for Apple's technology standard. The underlying communication technology is Bluetooth Low Energy. It allows Mobile Apps (running on both iOS and Android devices) to listen for signals from beacons in the physical world and react accordingly.  
**Example:** After this solution is applied in the mall, users will get AD push via WeChat Shake. The following data is provided by the third party (mall). [?](#)

**Config iBeacon based on Radio** [Global Setting](#)

**Radio 1**

UUID:  [?](#)

Major:  *Range: 0 - 65535*

Minor:  *Range: 0 - 65535*

[Save](#)

### 1.3.3.2.3 Client Limit

Client limit refers to the maximum number of associated STAs.

**Note:** Client Limit: Client Limit indicates the number of max associated clients allowed by the device

Client Limit:  *\* (Range 1 - 1024)*

[Save](#)

### 1.3.3.2.4 Radio Balance

Radio balance refers to the balance of STAs on each radio.

**Note:** Radio balance refers to the balance of STAs on each radio.

Enable Load Balance: ☒ ON

Radio1 : Radio2

RF Access Ratio:  :  \*

### 1.3.3.3 Network

#### 1.3.3.3.1 External Network Settings

External network settings are mainly about configuration of the communication mode between the AP and external network. Two communication modes are available: Bridge mode and NAT mode.


In **Bridge Mode**, the Ruijie APs act as bridges, allowing wireless clients to obtain their IP addresses from an upstream DHCP server.

In **NAT Mode**, the Ruijie APs run as DHCP servers to assign IP addresses to wireless clients out of a private 10.x.x.x IP address pool behind a NAT.




The AP you use might not support this function, which is subject to the actual menu items.

**Note:** This function is designed for ease of use based on user scenario. It is recommended to configure the function via Web instead of CLI. Aggregate port configuration is not supported.



☒ Bridge Mode

DHCP in others devices



☐ NAT Mode

DHCP in AP

VLAN:

IP Allocation Mode: Static IP (Dedicated IP)


IP:  (in the same subnet with the uplink device)

Mask:  \*

Default Gateway:  Optional


Save

**Note:** This function is designed for ease of use based on user scenario. It is recommended to configure the function via Web instead of CLI. Aggregate port configuration is not supported.



☐ Bridge Mode

DHCP in others devices



☒ NAT Mode

DHCP in AP

Port:  (If you want to change the port, please go to device configuration.)

IP Allocation Mode: Static IP (Dedicated IP)

IP:  \*

IP Mask:  \*

Default Gateway:  \*

NAT: ☒ Check this box if you want to convert all internal addresses to external addresses.

Save

You can select the AP working mode to determine the AP role and then configure based on the corresponding working mode.

Set corresponding parameters and save the configuration.

### 1.3.3.3.2 Interface

A port is a physical entity that is used for connections on the network devices.

#### Speed

Generally, the speed of an Ethernet physical port is determined through negotiation with the peer device. The negotiated speed can be any speed within the interface capability. You can also configure any speed within the interface capability for the Ethernet physical port on the Web page.

When you configure the speed of an AP port, the configuration takes effect on all of its member ports. (All these member ports are Ethernet physical ports.)

## Duplex Mode

Set the duplex mode of the interface to full-duplex so that the interface can receive packets while sending packets.

Set the duplex mode of the interface to half-duplex so that the interface can receive or send packets at a time.

Set the duplex mode of the interface to auto-negotiation so that the duplex mode of the interface is determined through auto negotiation between the local interface and peer interface.

## Interface Name

You can configure the name of an interface based on the purpose of the interface. For example, if you want to assign GigabitEthernet 1/1 for exclusive use by user A, you can describe the interface as "Port for User A."


## Administrative Status

You can configure the administrative status of an interface to disable the interface as required. If the interface is disabled, no frame will be received or sent on this interface, and the interface will loss all its functions. You can enable a disabled interface by configuring the administrative status of the interface. Two types of interface administrative status are defined: Up and Down. The administrative status of an interface is Down when the interface is disabled, and Up when the interface is enabled.

## Interface Settings

| Interface                                              |             |              |             |             |                      |
|--------------------------------------------------------|-------------|--------------|-------------|-------------|----------------------|
| Port                                                   | Link Status | Admin Status | Description | Information | Action               |
| Gi0/1                                                  | Up          | Up           |             |             | <a href="#">Edit</a> |
| Gi0/2                                                  | Down        | Up           |             |             | <a href="#">Edit</a> |
| Gi0/3                                                  | Down        | Up           |             |             | <a href="#">Edit</a> |
| Gi0/4                                                  | Down        | Up           |             |             | <a href="#">Edit</a> |
| Gi0/5                                                  | Down        | Up           |             |             | <a href="#">Edit</a> |
| Show No: <input type="text" value="10"/> Total Count:5 |             |              |             |             |                      |
| K First < Pre 1 Next > Last X 1 GO                     |             |              |             |             |                      |

- Editing port settings

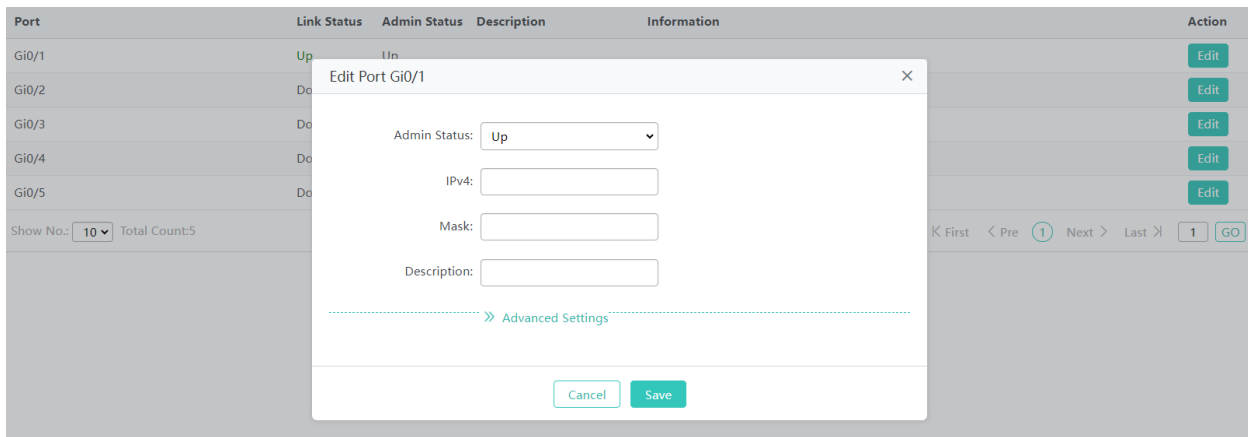


- 1) Click the **Edit** button for a port in the list.
- 2) The configuration for the port is displayed in the dialog box. Next, edit the configuration.
- 3) Click **Save**. The **Save operation succeeded** message is displayed.

#### 1.3.3.3.3 VLAN

A Virtual Local Area Network (VLAN) is a logical network created based on a physical network. A VLAN can be categorized into Layer-2 networks of the OSI model.

A VLAN has the same properties as a common LAN, except for physical location limitation. Unicast, broadcast and multicast frames of Layer 2 are forwarded and transmitted within a VLAN, keeping traffic segregated.

We may define a port as a member of a VLAN, and all terminals connected to this port are parts of a virtual network that supports multiple VLANs. You do not need to adjust the network physically when adding, removing and modifying users. Communication among VLANs is realized through Layer-3 devices, as shown in the following figure.

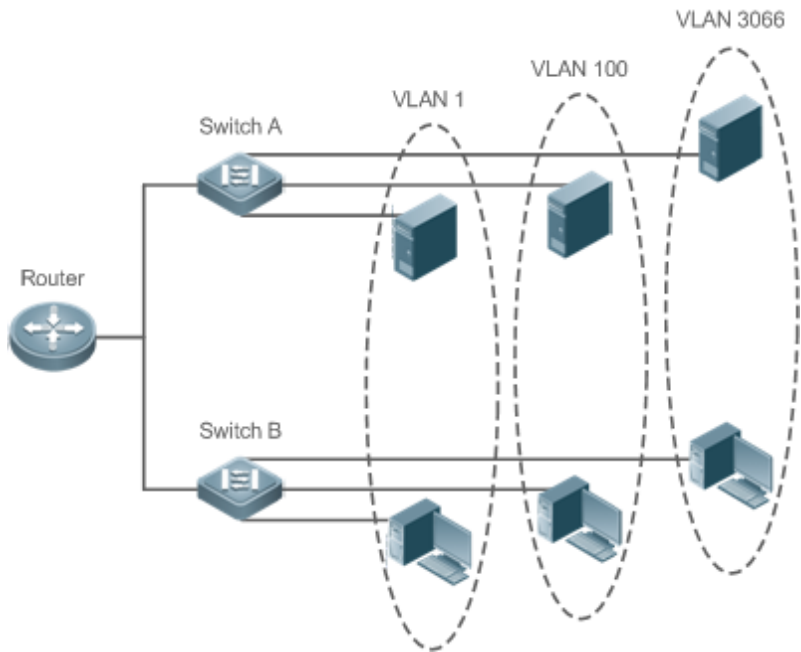

The VLANs supported by Ruijie products comply with the IEEE802.1Q standard. A maximum of 4094 VLANs (VLAN ID 1-4094) are supported, among which VLAN 1 cannot be deleted.

+ Add VLAN

✕ Delete Selected

| <input type="checkbox"/> | VLAN ID | IPv4         | IPv4 Mask     | IPv6 Address/Mask | IP Allocation Mode | Action                            |
|--------------------------|---------|--------------|---------------|-------------------|--------------------|-----------------------------------|
| <input type="checkbox"/> | 1       | 192.168.1.3  | 255.255.255.0 |                   | DHCP               | <div>Edit</div>                   |
| <input type="checkbox"/> | 2       | 192.168.10.1 | 255.255.255.0 |                   | Static IP Address  | <div>Edit</div> <div>Delete</div> |

Show No.:

10

Total Count:2

K First

< Pre

1

Next >

Last >

1

GO

- Adding a VLAN

Add VLAN

VLAN ID:

\*

(Range: 1-4094)

IP Allocation Mode:

Static IP Address

IP:

Submask:

Advanced Settings

IPv6 Address/Mask:

+

Cancel

Save

Click **Add VLAN**. A dialog box is displayed, as shown in the preceding figure. Set corresponding parameters in the dialog box and click **Save**. The newly added VLAN is displayed in the VLAN list after the **Add operation succeeded** message is displayed.

- Deleting VLANs in batches

+ Add VLAN

×

Delete Selected

| <input type="checkbox"/> | VLAN ID | IPv4         | IPv4 Mask     | IPv6 Address/Mask | IP Allocation Mode | Action                            |
|--------------------------|---------|--------------|---------------|-------------------|--------------------|-----------------------------------|
| <input type="checkbox"/> | 1       | 192.168.1.3  | 255.255.255.0 |                   | DHCP               | <div>Edit</div>                   |
| <input type="checkbox"/> | 2       | 192.168.10.1 | 255.255.255.0 |                   | Static IP Address  | <div>Edit</div> <div>Delete</div> |

Show No.:

10

Total Count:2

⌂ First

< Pre

1

Next >


Last ⌂

1

GO

- 1) Select the VLAN to be deleted from the list.
- 2) Click **Delete Selected** to finish deleting.

- Editing a VLAN

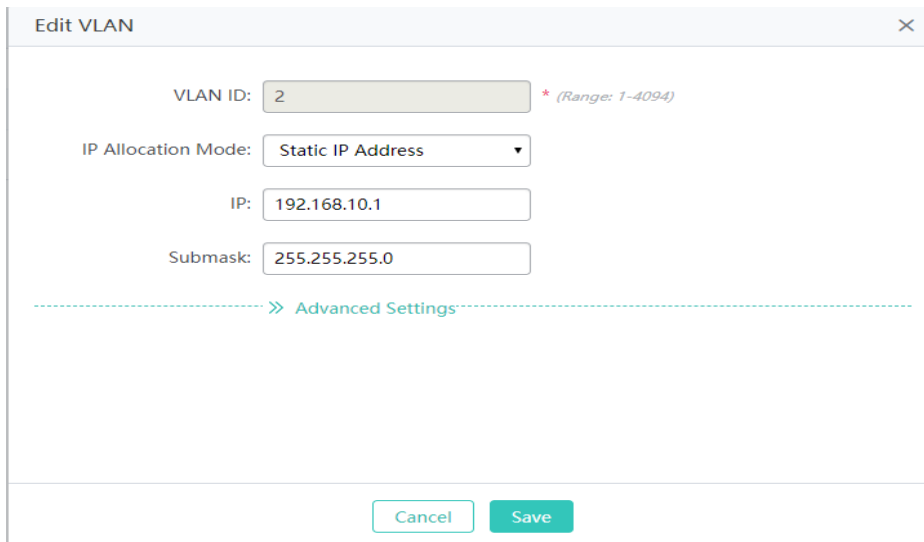

**Edit VLAN** [X]

VLAN ID:  \* (Range: 1-4094)

IP Allocation Mode:


IP:

Submask:

» Advanced Settings

Click the **Edit** button. A dialog box is displayed, as shown in the preceding figure. Click **Save**. The **Save operation succeeded** message is displayed.

- Deleting a VLAN

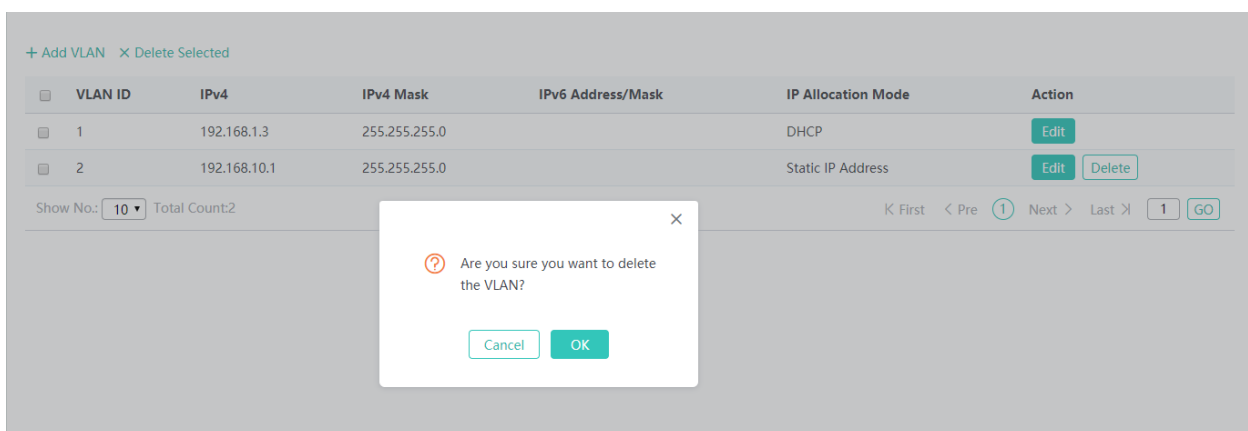

+ Add VLAN X Delete Selected

| <input type="checkbox"/> | VLAN ID | IPv4         | IPv4 Mask     | IPv6 Address/Mask | IP Allocation Mode | Action                                                                    |
|--------------------------|---------|--------------|---------------|-------------------|--------------------|---------------------------------------------------------------------------|
| <input type="checkbox"/> | 1       | 192.168.1.3  | 255.255.255.0 |                   | DHCP               | <input type="button" value="Edit"/>                                       |
| <input type="checkbox"/> | 2       | 192.168.10.1 | 255.255.255.0 |                   | Static IP Address  | <input type="button" value="Edit"/> <input type="button" value="Delete"/> |

Show No.:  Total Count: 2

K First < Pre ① Next > Last X 1 GO

Are you sure you want to delete the VLAN?

Click the **Delete** button for a VLAN in the list and then click **OK** in the displayed dialog box to finish deleting.

#### 1.3.3.3.4 Route

Routing is the process of selecting a path for traffic in a network, or between or across multiple networks.

Static routing is a form of routing that occurs when a router uses a manually-configured routing entry. In many cases, static routes are manually configured by a network administrator by adding in entries into a routing table, though this may not always be the case.

Default route is a setting on a computer that defines the packet forwarding rule to use when no specific route can be determined for a given Internet Protocol (IP) destination address. All packets for destinations not established in the routing table are sent via the default route.

Note: Routing includes a primary route and backup routes. When the primary route does not work, a backup route takes effect in accordance with the priority level. The Backup Route-1 has higher priority than the Backup Route-2.

+ Add Static Route

+ Add Default Route

✕ Delete Selected

| <input type="checkbox"/> | Destination Subnet | Subnet Mask | Next Hop Address | Egress Port | Routing       | Type          | Action                            |
|--------------------------|--------------------|-------------|------------------|-------------|---------------|---------------|-----------------------------------|
| <input type="checkbox"/> | 0.0.0.0            | 0.0.0.0     | 192.168.1.1      | VLAN1       | Primary Route | Default Route | <div>Edit</div> <div>Delete</div> |

Show No.: 

10

 Total Count:1

⏪

First

<

Pre

1

Next

>

Last

⏩

1

GO

● Adding a static route

Note: Routing includes a primary route and backup routes. When the primary route does not work, a backup route takes effect in accordance with the priority level. The Backup Route-1 has higher priority than the Backup Route-2.

+ Add Static Route

+ Add Default Route

✕ Delete Selected

| <input type="checkbox"/> | Destination Subnet | Subnet Mask | Next Hop Address | Egress Port | Routing       | Type          | Action                            |
|--------------------------|--------------------|-------------|------------------|-------------|---------------|---------------|-----------------------------------|
| <input type="checkbox"/> | 0.0.0.0            | 0.0.0.0     | 192.168.1.1      | VLAN1       | Primary Route | Default Route | <div>Edit</div> <div>Delete</div> |

Show No.: 

10

 Total Count:1

⏪

First

<

Pre

1

Next

>

Last

⏩

1

GO

Add Static Route

✕

IP Type: 

IPv4

IPv6

Destination Subnet:  \*

Subnet Mask:  \*

Egress Port: 

Select Port

Next Hop Address:  \*

Routing: 

Primary Route

 ⓘ

Cancel

Save

Click **Add Static Route**, set the configuration items in the dialog box displayed, and click **Save**. The newly added static route is displayed in the route list after the **Save operation succeeded** message is displayed.

● Adding the default route

Note: Routing includes a primary route and backup routes. When the primary route does not work, a backup route takes effect in accordance with the priority level. The Backup Route-1 has higher priority than the Backup Route-2.

+ Add Static Route

+ Add Default Route

✕ Delete Selected

| <input type="checkbox"/> | Destination Subnet | Subnet Mask | Next Hop Address | Egress Port | Routing       | Type          | Action                            |
|--------------------------|--------------------|-------------|------------------|-------------|---------------|---------------|-----------------------------------|
| <input type="checkbox"/> | 0.0.0.0            | 0.0.0.0     | 192.168.1.1      | VLAN1       | Primary Route | Default Route | <div>Edit</div> <div>Delete</div> |

Show No.: 

10

 Total Count:1

⏪

First

<

Pre

1

Next

>

Last

⏩

1

GO

Add Default Route

✕

IP Type: 

IPv4

IPv6

Egress Port: 

Select Port

Next Hop Address:  \*

Routing: 

Primary Route


 ⓘ

Cancel

Save


Click **Add Default Route**. Set the configuration items in the displayed dialog box, and click **Save**. The newly added route is displayed in the route list after the **Save operation succeeded** message appears.

- Deleting routes in batches

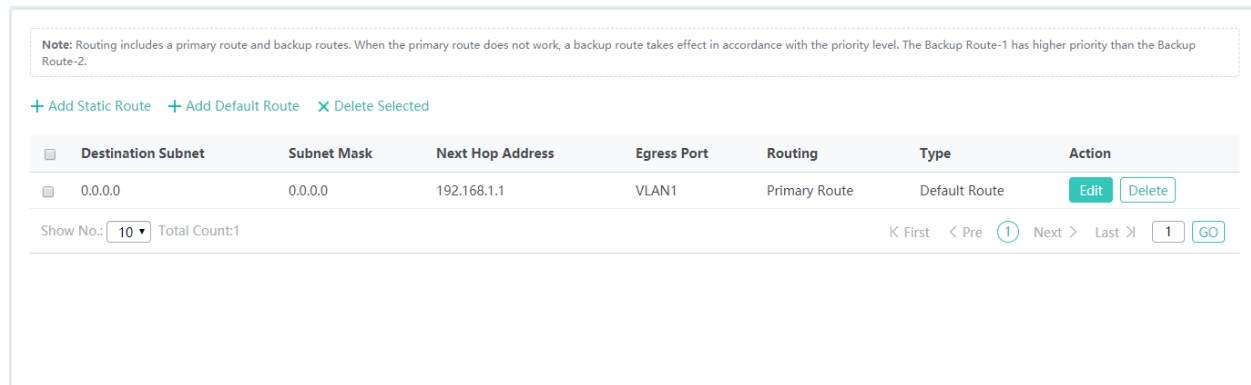

- 1) Select the route from the list.
- 2) Click **Delete Selected Route** to finish deleting.

- Editing a route

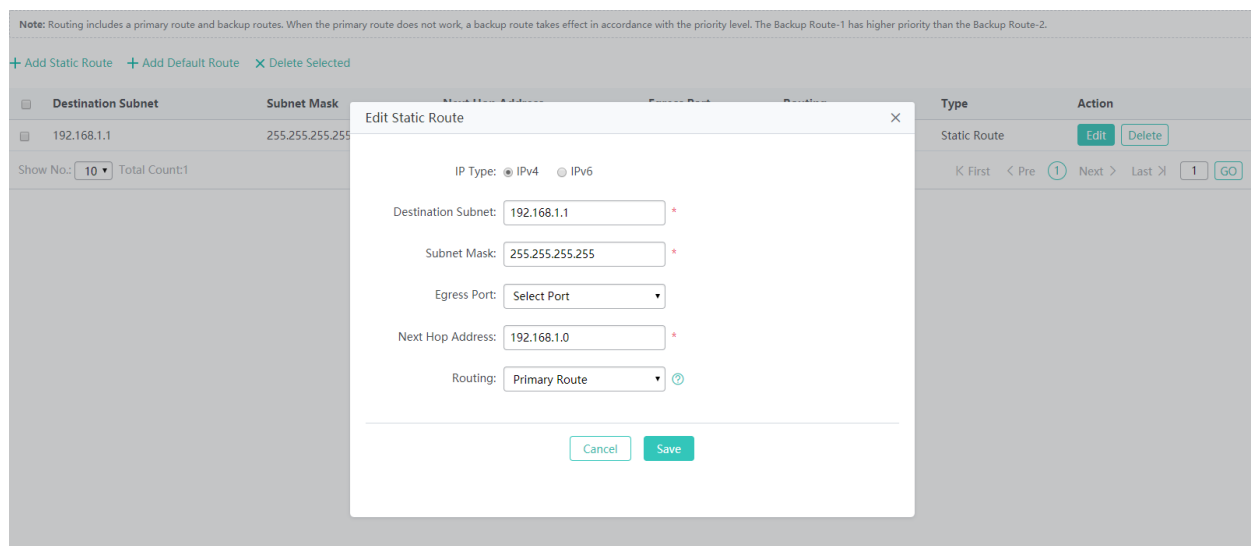

- 1) Click the **Edit** button for a route in the list.
- 2) A dialog box is displayed, as shown in the preceding figure. The configuration for the route is displayed. Next, edit the configuration.
- 3) Click **Save**. The **Save operation succeeded** message is displayed.

- Deleting a route

**Note:** Routing includes a primary route and backup routes. When the primary route does not work, a backup route takes effect in accordance with the priority level. The Backup Route-1 has higher priority than the Backup Route-2.

+ Add Static Route + Add Default Route X Delete Selected

| <input type="checkbox"/> | Destination Subnet | Subnet Mask     | Next Hop Address | Egress Port | Routing       | Type         | Action                                      |
|--------------------------|--------------------|-----------------|------------------|-------------|---------------|--------------|---------------------------------------------|
| <input type="checkbox"/> | 192.168.1.1        | 255.255.255.255 | 192.168.1.0      |             | Primary Route | Static Route | <a href="#">Edit</a> <a href="#">Delete</a> |

Show No.: 10 Total Count:1

First < Pre 1 Next > Last 1 GO

Click the **Delete** button for a route in the list and then click **OK** in the displayed dialog box to finish deleting.

### 1.3.3.3.5 DHCP

Dynamic Host Configuration Protocol (DHCP) is a client/server protocol that automatically provides an Internet Protocol (IP) host with its IP address and other related configuration information such as the subnet mask and default gateway. RFCs 2131 and 2132 define DHCP as an Internet Engineering Task Force (IETF) standard based on Bootstrap Protocol (BOOTP), a protocol with which DHCP shares many implementation details. DHCP allows hosts to obtain required TCP/IP configuration information from a DHCP server.

DHCP supports three mechanisms for IP address allocation. In "automatic allocation", DHCP assigns a permanent IP address to a client. In "dynamic allocation", DHCP assigns an IP address to a client for a limited period of time (or until the client explicitly relinquishes the address). In "static allocation", a client's IP address is assigned by the network administrator, and DHCP is used simply to convey the assigned address to the client. A particular network will use one or more of these mechanisms, depending on the policies of the network administrator.

#### ➤ DHCP Settings

DHCP Settings

Static Address

DHCP Relay

Client List

+ Add DHCP

× Delete Selected

🚫 Excluded Address Range

DHCP: 

ON

| <div>☐</div> | Name     | IP Address Range            | Default Gateway | Lease Time | DNS                    | Action                            |
|--------------|----------|-----------------------------|-----------------|------------|------------------------|-----------------------------------|
| <div>☐</div> | ap_pool1 | 192.168.10.1-192.168.10.254 | 192.168.10.1    | 8 hour(s)  | 192.168.58.110,8.8.8.8 | <div>Edit</div> <div>Delete</div> |

Show No.:

10 ▾

Total Count:1

⏪ First

< Pre

1


Next >

Last ⏩

1


GO

- Adding a DHCP Pool

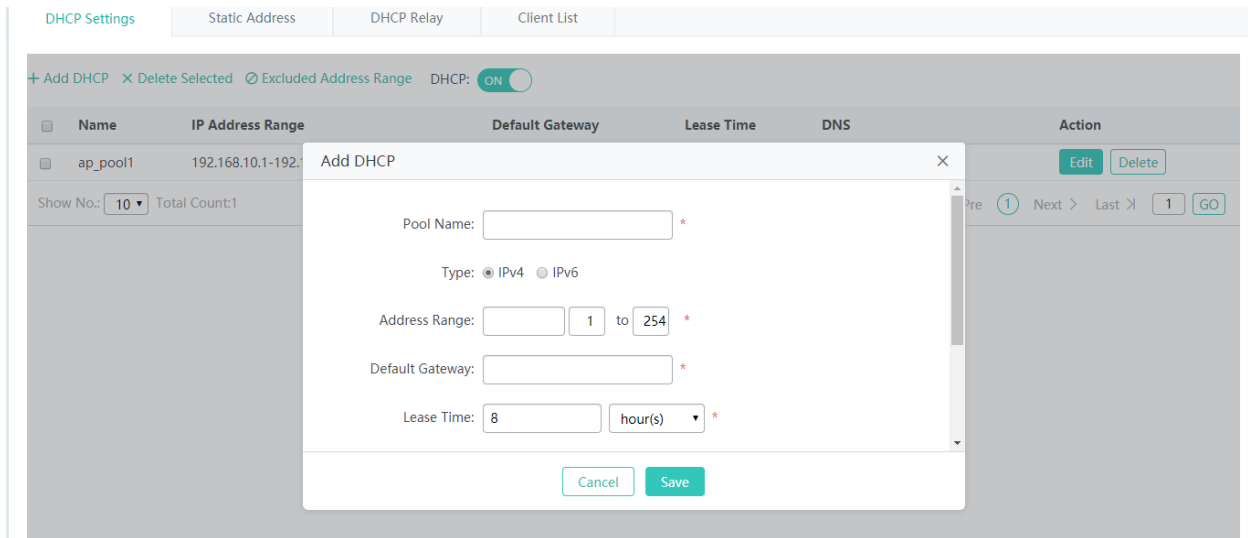


Click **Add DHCP**, set the configuration items in the dialog box displayed, and click **Save**. The newly added DHCP pool is displayed in the DHCP pool list after the **Save operation succeeded** message is displayed.

- Deleting DHCPs in batches

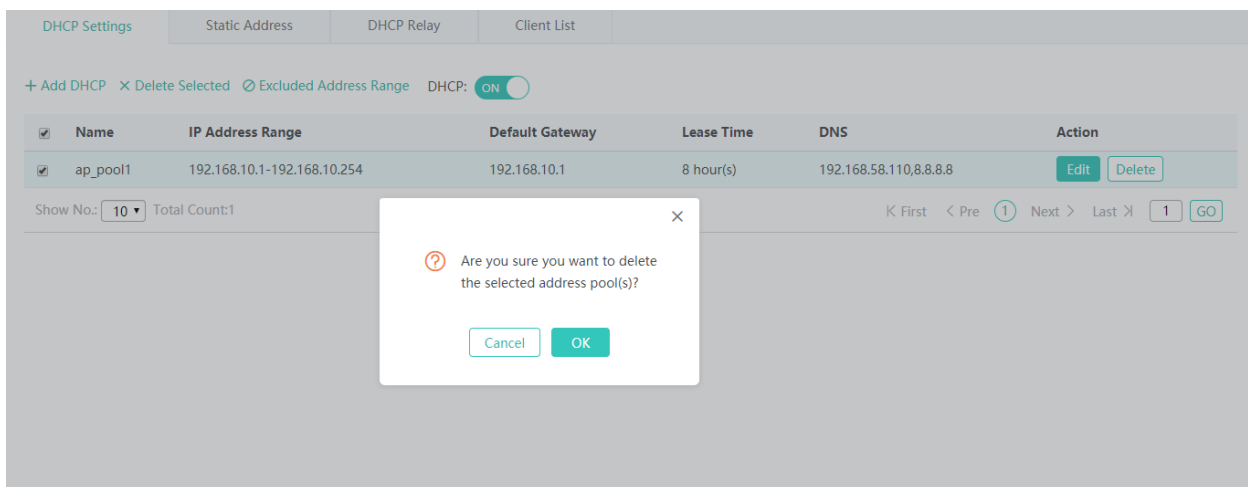


- 1) Select the DHCP pool from the list.
- 2) Click **Delete Selected DHCP** and then click **OK** in the dialog box displayed to finish deleting.


- Configuring excluded address range

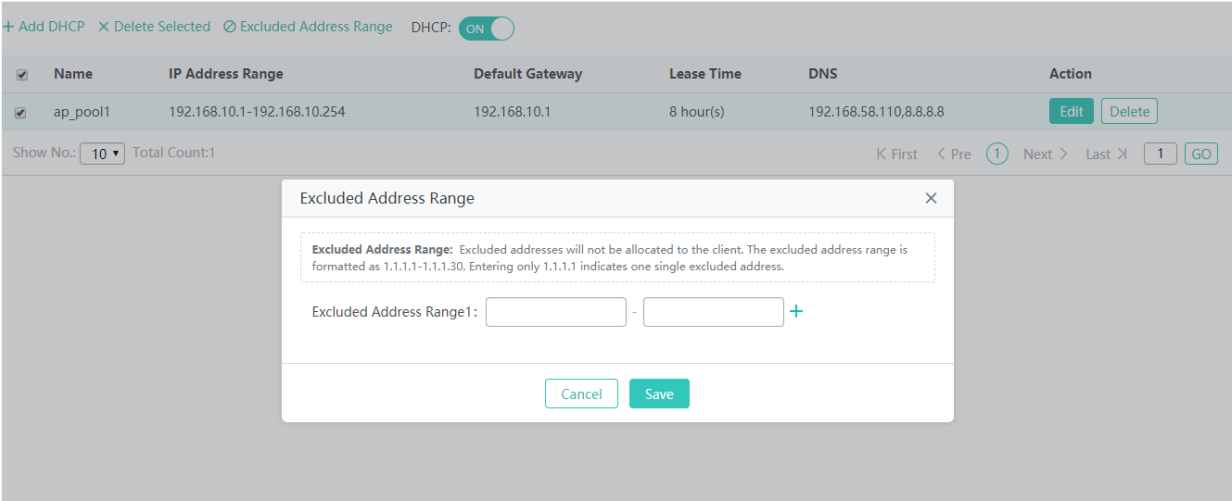

Click **Excluded Address Range**. A dialog box is displayed, as shown in the preceding figure. Set the configuration items in the displayed dialog box, and click **Save**. The newly configured address range is displayed in the DHCP pool list after the **Save operation succeeded** message is displayed.

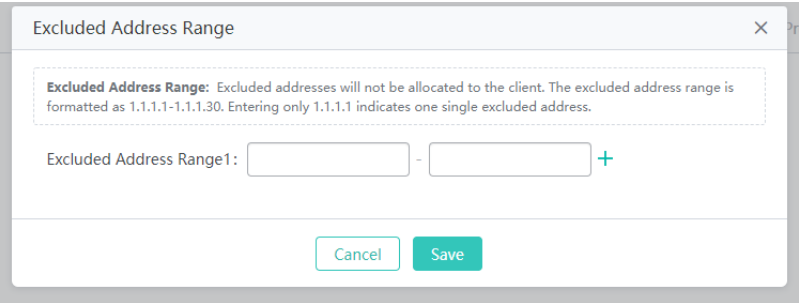

● DHCP service

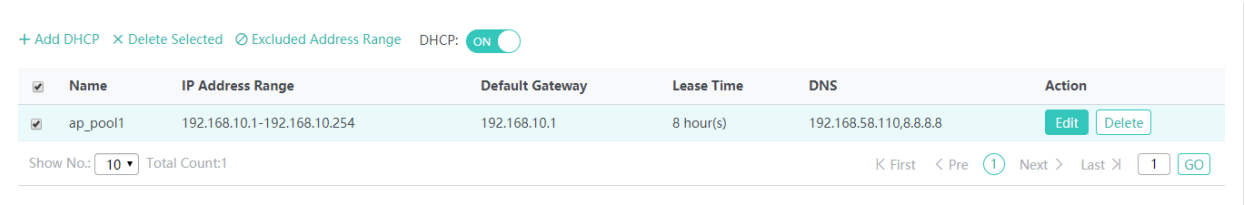

Click **DHCP: ON** to enable or disable the DHCP service.

● Editing a DHCP pool

Edit DHCP

Pool Name:

ap\_pool1

\*

Type:

IPv4

IPv6

Address Range:

192.168.10

1

to

254

\*

Default Gateway:

192.168.10.1

\*

Lease Time:

8

hour(s)

\*

Cancel

Save

- 1) Click the **Edit** button for a DHCP pool in the list.

2) The configuration for the DHCP pool is displayed in the dialog box. Next, edit the configuration.

3) Click **Save**. The **Save operation succeeded** message is displayed.

● Deleting a DHCP pool
- DHCP Settings

Static Address

DHCP Relay

Client List

Add DHCP

×

Delete Selected

⌕

Excluded Address Range

DHCP:

ON

|                                     | Name     | IP Address Range            | Default Gateway | Lease Time | DNS                    | Action                |
|-------------------------------------|----------|-----------------------------|-----------------|------------|------------------------|-----------------------|
| <input checked="" type="checkbox"/> | ap_pool1 | 192.168.10.1-192.168.10.254 | 192.168.10.1    | 8 hour(s)  | 192.168.58.110,8.8.8.8 | <div>EditDelete</div> |

Show No.:

10

Total Count:

1

⏪

First

<

Pre

1

Next

>

Last

⏩

1

GO

?

Please retain at least one DHCP address pool for the DHCP service. Are you sure you want to delete the address pool?

Cancel

OK
- Click **Delete** to finish deleting.
-  **Static Address**
- 27

| DHCP Settings                          |             |             |               |                 |                |            |
|----------------------------------------|-------------|-------------|---------------|-----------------|----------------|------------|
| Static Address                         |             |             |               |                 |                |            |
| DHCP Relay                             |             |             |               |                 |                |            |
| Client List                            |             |             |               |                 |                |            |
| + Add Static Address × Delete Selected |             |             |               |                 |                |            |
| <input type="checkbox"/>               | Client Name | Client IP   | Mask          | Gateway Address | Client MAC     | DNS Server |
| <input type="checkbox"/>               | test        | 192.168.1.4 | 255.255.255.0 | 192.168.1.1     | 0002.0001.0004 | 8.8.8.8    |
|                                        |             |             |               |                 |                |            |
| Show No.: 10 ▼ Total Count:1           |             |             |               |                 |                |            |
| K First < Pre 1 Next > Last X 1 GO     |             |             |               |                 |                |            |

- Adding a static address

Add Static Address

Client Name:

\*

Client IP:

\*

Mask:

Client MAC:

\*

Gateway Address:

\*

DNS:

\*

Cancel

Save

Click **Add Static Address**, set the configuration items in the displayed dialog box, and then click **Save**. The newly added static address is displayed in the list after the **Save operation succeeded** message is displayed.

- Deleting static addresses in batches

+ Add Static Address × Delete Selected

| <input type="checkbox"/> | Client Name | Client IP   | Mask          | Gateway Address | Client MAC     | DNS Server | Action                |
|--------------------------|-------------|-------------|---------------|-----------------|----------------|------------|-----------------------|
| <input type="checkbox"/> | test        | 192.168.1.4 | 255.255.255.0 | 192.168.1.1     | 0002.0001.0004 | 8.8.8.8    | <div>EditDelete</div> |

Show No.: 10 ▼ Total Count:1

K First < Pre 1 Next > Last X 1 GO

?

Are you sure you want to delete the static address?

CancelOK

- 1) Select the static address from the list.
  - 2) Click **Delete Selected Address** and then click **OK** in the dialog box displayed to finish deleting.
- Editing a static address

Edit Static Address

Client Name: test \*

Client IP: 192.168.1.4 \*

Mask: 255.255.255.0

Client MAC: 0002.0001.0004 \*

Gateway Address: 192.168.1.1 \*

DNS: 8.8.8.8 \*

Cancel

Save

- 1) Click the **Edit** button for a static address in the list. A dialog box is displayed.
  - 2) The configuration for the static address is displayed in the dialog box. Next, edit the configuration.
  - 3) Click **Save**. The **Save operation succeeded** message is displayed.
- Deleting a static address

+ Add Static Address × Delete Selected

| <input type="checkbox"/> | Client Name | Client IP   | Mask          | Gateway Address | Client MAC     | DNS Server | Action                |
|--------------------------|-------------|-------------|---------------|-----------------|----------------|------------|-----------------------|
| <input type="checkbox"/> | test        | 192.168.1.4 | 255.255.255.0 | 192.168.1.1     | 0002.0001.0004 | 8.8.8.8    | <div>EditDelete</div> |

Show No.: 10 ▼ Total Count:1

K First < Pre 1 Next > Last X 1 GO

?

Are you sure you want to delete the static address?

Cancel

OK

Click the **Delete** button for a static address in the list to finish deleting.

## ↩ DHCP Relay

DHCP Settings

Static Address

DHCP Relay

Client List

**Note:** Please go to [DHCP](#) to enable DHCP server before enabling DHCP relay.

DHCP server IP1:  +

Save

Enter the relay server address and click **Save**.

## Client List

DHCP Settings

Static Address

DHCP Relay

Client List

**Note:** If you want to delete a static address converted from a dynamic address, please go to the Static Address page.

Bind MAC to Dynamic IP

IP-based

Search

| IP           | MAC            | Lease Time                      | Allocation Type    | Action                 |
|--------------|----------------|---------------------------------|--------------------|------------------------|
| 192.168.10.2 | b40b.4456.f837 | 0 Day(s) 7 hour(s) 59 minute(s) | Dynamic Allocation | <a href="#">Delete</a> |

Show No.:  Total Count:1

First < Pre 1 Next > Last 1 GO

- Binding a MAC address to a dynamic IP address

**Note:** If you want to delete a static address converted from a dynamic address, please go to the Static Address page.

Bind MAC to Dynamic IP

IP-based

Search

| IP | MAC | Lease Time | Allocation Type | Action |
|----|-----|------------|-----------------|--------|
|    |     |            |                 |        |

Show No.:  Total Count:0

First < Pre Next > Last 1 GO

Bind operation succeeded. STA information will be updated after the STA goes online next time.

OK

- 1) Select the static address from the list.
  - 2) Click **Bind MAC to Dynamic IP** and then click **OK** in the displayed dialog box to finish deleting.
- Querying clients based on IP address:

DHCP SettingsStatic AddressDHCP RelayClient List

Note: If you want to delete a static address converted from a dynamic address, please go to the Static Address page.

Bind MAC to Dynamic IP

IP-based192.

Search

| <input type="checkbox"/> | IP           | MAC            | Lease Time                      | Allocation Type    | Action            |
|--------------------------|--------------|----------------|---------------------------------|--------------------|-------------------|
| <input type="checkbox"/> | 192.168.10.2 | b40b.4456.f837 | 0 Day(s) 7 hour(s) 59 minute(s) | Dynamic Allocation | <div>Delete</div> |

Show No.:10Total Count:1

K First < Pre 1 Next > Last 1GO

Input the IP address in the text box. Click **Search**. The search results meeting the criterion are displayed in the list.

1.3.3.3.6 Port Mapping

Generally, this function is used to map a specified port of a specified host in the internal network to a specified port of an external network address.

 This function may not be supported. The actual menu may vary with the device.

Note: A port of the specified host on the intranet is mapped to the specified port on the internet generally.

+ Add Port Mapping


✕ Delete Selected

| <input type="checkbox"/> | Mapping Mode | Internal IP Address | Inner Port | External IP Address | Outer Port | Protocol Type | Port                | Action                |
|--------------------------|--------------|---------------------|------------|---------------------|------------|---------------|---------------------|-----------------------|
| <input type="checkbox"/> | Port Mapping | 192.168.10.4        | 8083       | -                   | 8083       | TCP           | GigabitEthernet 0/2 | <div>EditDelete</div> |

Show No.:10Total Count:1


K First < Pre 1 Next > Last 1GO

- Adding port mapping

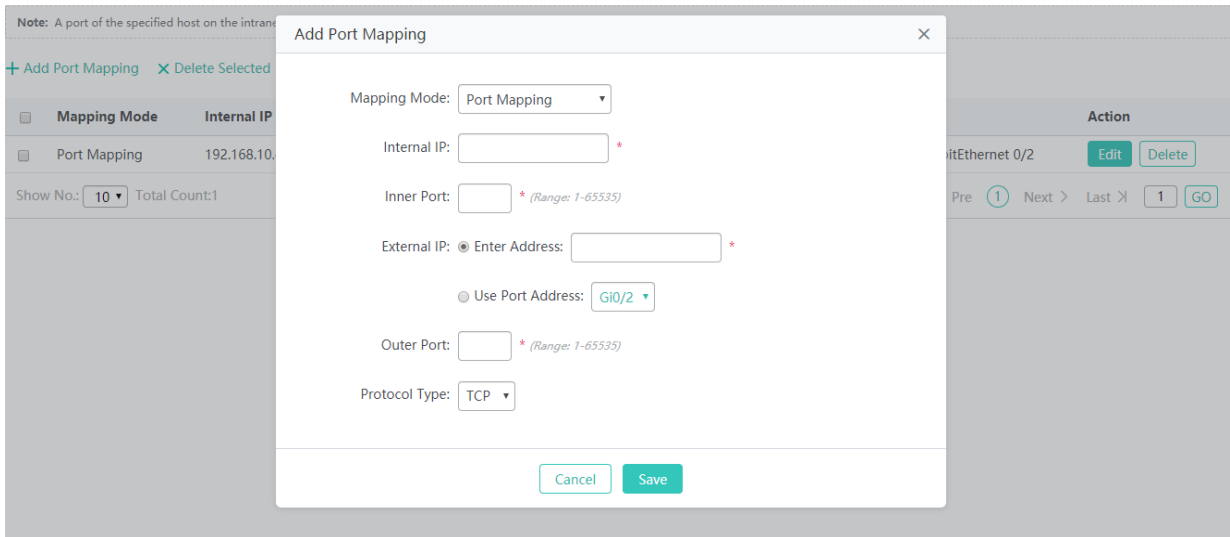

Click **Add Port Mapping**, set the configuration items in the dialog box displayed, and then click **Save**. The newly added port mapping is displayed in the list after the **Save operation succeeded** message is displayed.

- Batch deleting port mapping entries

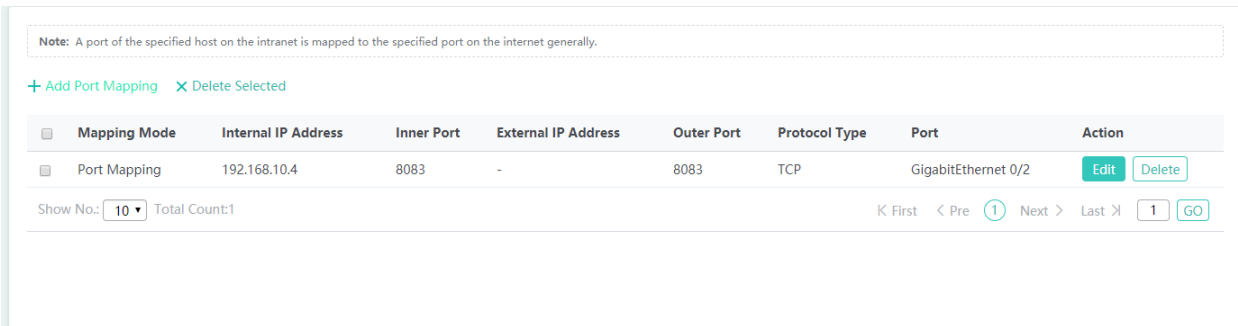

- 1) Select the port mapping from the list.
- 2) Click **Delete Selected Port Mapping** and then click **OK** in the displayed dialog box to finish deleting.

- Editing port mapping

Edit Port Mapping

Mapping Mode: Port Mapping

Internal IP: 192.168.10.4

Inner Port: 8083

External IP: Enter Address:

Use Port Address: Gi0/2

Outer Port: 8083

Protocol Type: TCP

Cancel

Save

- 1) Click the **Edit** button for a port mapping in the list.

2) The configuration for port mapping is displayed in the dialog box. Next, edit the configuration.

3) Click **Save**. The **Save operation succeeded** message is displayed.

● Deleting port mapping

Note: A port of the specified host on the intranet is mapped to the specified port on the internet generally.

+ Add Port Mapping

× Delete Selected

| <input type="checkbox"/> | Mapping Mode | Internal IP Address | Inner Port | External IP Address | Outer Port | Protocol Type | Port                | Action                |
|--------------------------|--------------|---------------------|------------|---------------------|------------|---------------|---------------------|-----------------------|
| <input type="checkbox"/> | Port Mapping | 192.168.10.4        | 8083       | -                   | 8083       | TCP           | GigabitEthernet 0/2 | <div>EditDelete</div> |

Show No.: 10

Total Count:1

K First

< Pre

1

Next >

Last >

1

GO

Click the **Delete** button for a port mapping entry in the list to finish deleting.

1.3.3.3.7 VPN

It is only allowed to configure VPN settings on a WAN port.

Note: IPSec settings only take effect on a layer-3 interface.

WAN Port:  (If you change the WAN port here, please also change the uplink port on the device.)

Local IP Address:  \*(Example: 192.168.0.0)

Local Submask:  \*

HQ IP Address:  \*(Example: 192.168.0.0)

HQ Submask:  \*

VPN Address:  \*

Shared Key:  \*

The **Advanced Settings** include some algorithm settings. It is recommended to use the default settings.

Advanced Settings

Encryption Algorithm: ☒ DES ☐ 3DES ☐ AES256 ☐ AES192 ☐ AES128

Auth Algorithm: ☒ MD5 ☐ SHA

DH Group ☐ 5 ☒ 2 ☐ 1

ESP Encryption ☒ esp-des

Algorithm:

ESP Auth Algorithm: ☒ esp-md5-hmac

Keepalive Time(s):

### 1.3.3.4 Security

#### 1.3.3.4.1 Containment

Rogue APs may exist in a WLAN. Rogue APs may have security vulnerabilities and can be manipulated by attackers to seriously threaten and endanger network security. The containment function can be enabled on the AP to attack rogue devices and prevent other wireless STAs from being associated with rogue devices.

#### ➤ Containment Settings

Containment Settings

Trusted Device List

Keyword

**Note:** The function detects and contains unauthorized or malicious APs (such as rogue AP, unauthorized AP, attacker-controlled AP, illegal bridge and unauthorized ad-hoc device) to protect users.  
**Note:** If you want to view rogue APs, please click[Rogue AP]

Rogue AP Containment: ☒ ON [\[Scan All Neighboring APs\]](#)

Working Mode: ☐ Monitor ☐ Hybrid ☒ Normal [?](#)

Apply to: ☒ AP ☐ Radio ☐ AI Radio [?](#)

Containment Mode: ☐ SSID Mode: Contain APs emitting the same WIFI signal as the current AP [\[Configure Phishing WIFI Keyword\]](#)

☐ AdHoc Mode: Contain APs emitting signals simulated by non-APs (such as AdHoc)

☐ Rogue Mode: Contain APs according to RSSI

☐ CONFIG Mode: Contain APs by configuring the MAC address and the SSID blacklist manually [\[+MAC Address\]](#) [\[+SSID Blacklist\]](#)

☐ Enable Fuzzy Containment [?](#)

Containment Range: ☒ Scan/Contain APs in the same channel as the current AP

☐ Scan/Contain APs in all channels (consuming more resources)

[Save](#)

Click  to enable or disable rogue AP containment for the device.

- Adding a MAC address

You can add the MAC address to be contained here.

Add MAC Address(BSSID) to be Contained

+ Add

Current MAC: 8005.8808.17e0

Cancel

Save

- Adding an SSID blacklist

You can add the MAC address to be contained here.

Add SSID Blacklist

+ Add

Cancel

Save

## Trusted AP

When the rogue AP containment function is enabled, the APs not authorized will be contained. However, some APs are trusted devices and special processing is required. You can configure the MAC addresses of trusted devices.

Containment Settings

Trusted Device List

Keyword

Note: The following MAC addresses correspond to trusted APs, which will not be contained.

Trusted MAC(BSSID):  

+ Add

Trusted Vendor List

OUI:  
+ Add

Multi-to-Multi

SSID:  
+ Add

Save

➤ **Phishing Wi-Fi Keyword**

If an SSID matches with the keyword fuzzily, the Wi-Fi is a phishing Wi-Fi.

Containment Settings

Trusted Device List

Keyword

Note: If an SSID matches with the keyword fuzzily, the WiFi is a phishing WiFi.

Note: The keyword takes effect only when fuzzy containment is enabled. Please enable fuzzy containment first.[Containment Settings]

Phishing WiFi Keyword1:

+

Save

**1.3.3.4.2 Blacklist & Whitelist**

This function allows or blocks specified users from accessing the Wi-Fi.

The whitelist/blacklist capacity is 1024 by default.

➤ **Blacklist & Whitelist**

Add the blacklist or whitelist user by adding the MAC address.

Blacklist & Whitelist

SSID-based Blacklist

Dynamic Blacklist & Whitelist

OUI Blacklist & Whitelist

Note: The function specifies the users allowed to access the WiFi or denied from accessing the WiFi. The MAC address is the hardware address of the client (such as laptop or mobile phone) associated with the AP.

List Type: ☒ Deny MAC address from accessing WiFi (Blacklist) ☐ Permit MAC address to access WiFi (Whitelist)

+ Add User

✕ Delete Selected

✔ Batch Import Users

MAC-based

Search

Reset

| <input type="checkbox"/> | Name | MAC            | Action                |
|--------------------------|------|----------------|-----------------------|
| <input type="checkbox"/> |      | 0001.0002.0002 | <div>EditDelete</div> |

Show No.:  Total Count:1

⌂ First

< Pre

1

Next >


Last ⌂

GO

Current MAC: 00d0.f019.9157 


Delete All

Click **+ Add User** to add a MAC address for a user. You can add multiple MAC addresses.

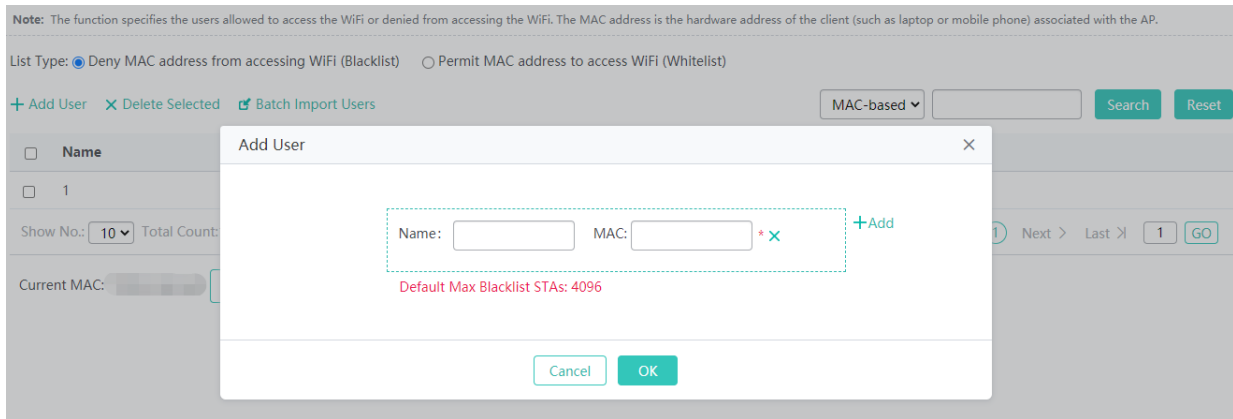

- Deleting a blacklist user


Click **Delete** to delete a MAC address for a user.

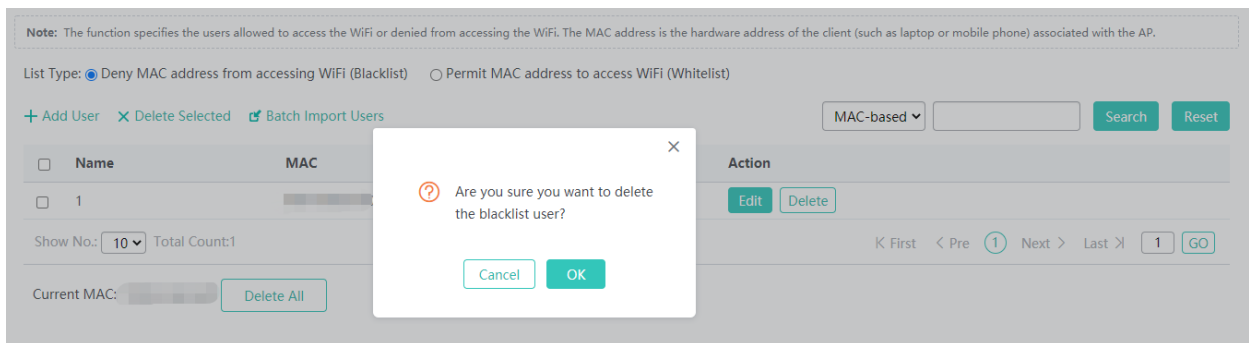

- Deleting blacklist users in batches

1. Select one or more records from the list.

2. Click **Delete Selected**.

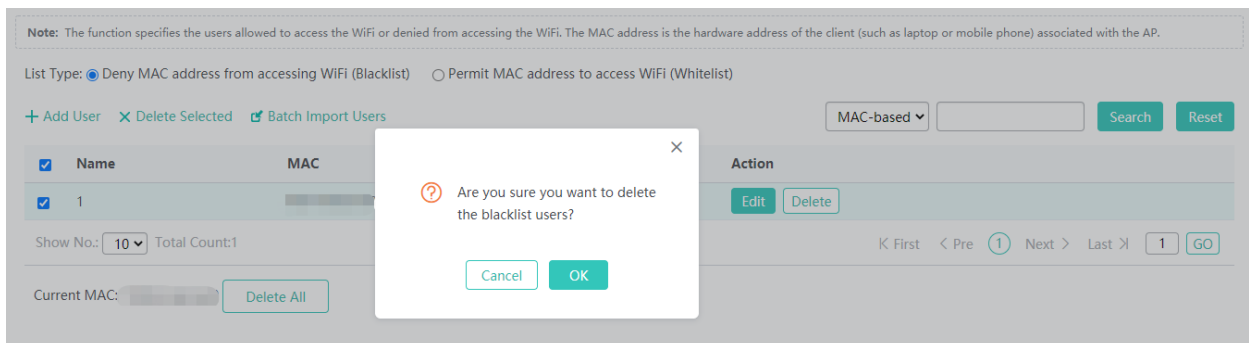

- Importing blacklist users

1. Click **Batch Import Users**.

2. Download the template file and enter the data.

### 3. Import the file.

**Note:** The function specifies the users allowed to access the WiFi or denied from accessing the WiFi. The MAC address is the hardware address of the client (such as laptop or mobile phone) associated with the AP.

List Type: ☒ Deny MAC address from accessing WiFi (Blacklist) ☐ Permit MAC address to access WiFi (Whitelist)

+ Add User ✕ Delete Selected 📄 Batch Import Users

MAC-based

| <input checked="" type="checkbox"/> | Name | MAC | Action |
|-------------------------------------|------|-----|--------|
| <input checked="" type="checkbox"/> | 1    |     |        |

Show No.:  Total Count:1

Current MAC:

**Batch Import Users**

**Note:** It is recommended to download the template, fill in data and import the file. Template: [listen.csv](#) [Download](#)  
Template List Capacity: 4096

File:

### SSID-based Blacklist

Blacklist & Whitelist **SSID-based Blacklist** Dynamic Blacklist & Whitelist OUI Blacklist & Whitelist

**Note:** If you want to add a WiFi, please go to [Add WiFi](#)

| SSID       | Action                                                                                                                     |
|------------|----------------------------------------------------------------------------------------------------------------------------|
| Eweb_91571 | <input checked="" type="button" value="Blacklist/Whitelist"/> <input type="button" value="OUI Whitelist &amp; Blacklist"/> |

Show No.:  Total Count:1

[First](#) [Pre](#) [1](#) [Next](#) [Last](#)

Click **Blacklist/Whitelist** in the list and configure the whitelist/blacklist for the specified SSID.

**Blacklist/Whitelist**

**Note:** The function specifies the users allowed to access the WiFi or denied from accessing the WiFi. The MAC address is the hardware address of the client (such as laptop or mobile phone) associated with the AP.

List Type: ☒ Deny MAC address from accessing WiFi (Blacklist) ☐ Permit MAC address to access WiFi (Whitelist)

+ Add User 📄 Batch Import Users

MAC-based

| <input type="checkbox"/> | Name | MAC | Action |
|--------------------------|------|-----|--------|
| No Data Found            |      |     |        |

Show No.:  Total Count:0

Current MAC:

[First](#) [Pre](#) [Next](#) [Last](#)

You can select the blacklist/whitelist type, add blacklist/whitelist users, and import blacklist/whitelist users.

### Dynamic Blacklist & Whitelist

Add malicious attack sources to the dynamic blacklist to prohibit access.

Blacklist & Whitelist

SSID-based Blacklist

Dynamic Blacklist & Whitelist

OUI Blacklist & Whitelist

**Note:** With attack detection and dynamic blacklist function enabled, the AP adds the attack source to the dynamic blacklist automatically after identifying the attack. When the effective time runs out, the attack source is removed from the blacklist automatically.

Detection Mode:

☐ Flood Attack Detection ?

☐ Spoofing Attack Detection ?

☐ Weak Initialization Vector Detection ?

☐ DDoS Attack ?

Dynamic Blacklist:

☐ On

Effective Time:

\* (Range: 60-86400 seconds)

Save

Refresh

Delete Selected

| <input type="checkbox"/> | Number | MAC | Effective Time | Type | Action |
|--------------------------|--------|-----|----------------|------|--------|
| No Data Found            |        |     |                |      |        |

Show No.:

Total Count:0

First

Pre

Next

Last

GO

- 1) Set the parameters and then save the configuration.
- 2) Select the blacklist from the list.
- 3) Click Delete Selected and then click OK in the displayed dialog box to finish deleting.

## OUI Blacklist & Whitelist

Blacklist & Whitelist

SSID-based Blacklist

Dynamic Blacklist & Whitelist

OUI Blacklist & Whitelist

**Note:** You can configure whitelisted OUI to allow(noallow) some organizations to access Eweb.

List Type:

☒ The following manufacturers are prohibited from accessing WiFi (black list)

☐ Only the following manufacturers are allowed to access WiFi (white list)

+ Add OUI

Delete Selected

Import OUIs

Search

Reset

| <input type="checkbox"/> | Remark | OUI | Action |
|--------------------------|--------|-----|--------|
| <input type="checkbox"/> |        |     | Delete |
| <input type="checkbox"/> |        |     | Delete |

Show No.:

Total Count:2

First

Pre

Next

Last

GO

Clear All

### Add OUI

**Note:** You can configure whitelisted OUI to allow(noallow) some organizations to access Eweb.

List Type:

☒ The following manufacturers are prohibited from accessing WiFi (black list)

☐ Only the following manufacturers are allowed to access WiFi (white list)

+ Add OUI

Delete Selected

Import OUIs

Search

Reset

| <input type="checkbox"/> | Remark |
|--------------------------|--------|
|--------------------------|--------|

Show No.:

Total Count:2

First

Pre

Next

Last

GO

Add blacklist manufacturer

Name:

OUI:

\*


+Add

Cancel

OK


Click **Add OUI**, set the configuration items in the dialog box displayed, and click **Save**. The newly added OUI is displayed in the OUI list after the **Add succeeded** message is displayed.

- Deleting OUIs in batches

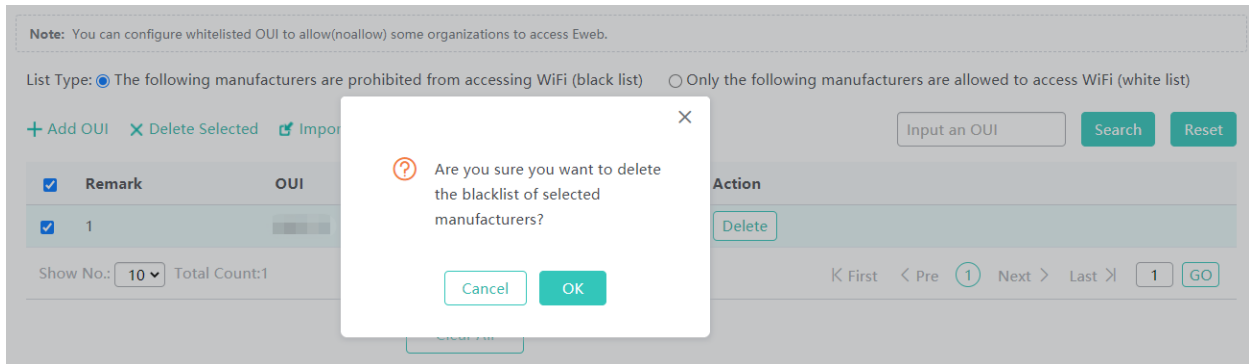

1. Select the OUI from the list.
2. Click **Delete Selected** and then click **OK** in the dialog box displayed to finish deleting.

- Deleting a OUI

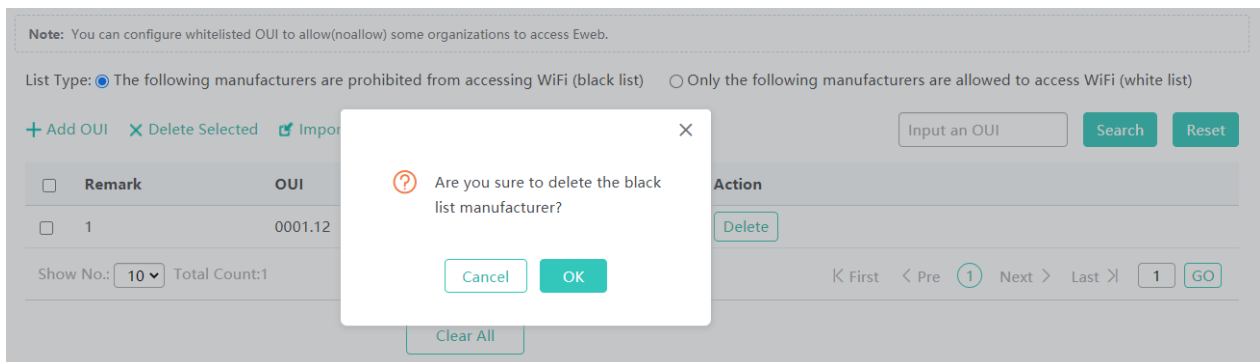

Click **Delete** to finish deleting.

- Importing OUIs

**Note:** You can configure whitelisted OUI to allow(noallow) some organizations to access Eweb.

List Type: ☒ The following manufacturers are prohibited from accessing WiFi (black list) ☐ Only the following manufacturers are allowed to access WiFi (white list)

+ Add OUI X Delete Selected Import OUIs

Input an OUI Search Reset

Batch import blacklist manufacturers

**Note:** It is recommended to download the template, fill in data and import the file. Template: ouulist.csv  
[Download Template](#) List Capacity: 4096  
 The '[end]' at the end of the template is the configuration terminator and **cannot be deleted, otherwise the import will fail.**  
 The template format is as follows:  
 type | mac | SSID | apg-name | wlan-id | ap-mac | mnemonic  
**Type in the template should fill in vendor blacklist, and MAC column should not be empty!**  
**Example: 0001.11. If you enter 1.11, it will be displayed as 0001.11.**

Blacklist manufacturer:  Browse Import

1. Click **Import OUIs**.
2. Download the template file and enter the data.
3. Import the file.

#### 1.3.3.4.3 User Isolation

To ensure network security and prevent unwitting information transfer, you can prohibit communication between internal network users by means of configuration. Some special users (users who can access each other) can be identified based on the user name and MAC address.

**Note:** The function prevents users from communicating with each other without affecting their access to the network, ensuring service security.  
**Note:** Only Layer-2 isolation is supported currently.

User Isolation: ☒

Whitelisted MAC: Username:  MAC:  X +Add

Current MAC: 0074.9cbd.af26

Save

- 1) Click **User Isolation:** ☒ to enable or disable mutual access for internal network users.
- 2) Click **X** to delete the MAC address of the user.
- 3) Click the **Add** icon to add a MAC address for a mutual-access user. You can add multiple MAC addresses.

- 4) Click **Save** to finish the configuration.

#### 1.3.3.4.4 Anti-attack

Some malicious attacks are always found in the network environment. These attacks may bring about an extremely heavy burden for the switch, resulting in the switch using an excessive amount of CPU power and giving rise to a potential operational failure.

ARP-guard: ☒ Enable ARP-guard, so as to prevent a large number of invalid ARP packets from attacking the device.  
[\[ARP-guard List\]](#)

IP-guard: ☒ Enable IP-guard, so as to prevent hackers from scanning the entire network and consuming bandwidth.  
[\[IP-guard List\]](#)

ICMP-guard: ☒ Enable ICMP-guard, so as to prevent a large number of invalid ICMP packets from consuming bandwidth and CPU resources.  
[\[ICMP-guard List\]](#)

DHCP-guard: ☒ Enable DHCP-guard, so as to prevent malicious requests from exhausting DHCP pools and leaving legitimate users unable to access the Internet.  
[\[DHCP-guard List\]](#)

DHCPv6-guard: ☒ Enable DHCPv6-guard, so as to prevent malicious requests from exhausting DHCPv6 pools and leaving legitimate users unable to access the Internet.  
[\[DHCPv6-guard List\]](#)

ND-guard: ☒ Enable ND-guard, so as to prevent Neighbor Discovery packets from consuming bandwidth.

Display NFPP Log: [\[Display NFPP Log\]](#)

- 1) **ARP-guard**: Enables ARP-guard configuration. Click the **ARP-guard List** link to view the host where ARP attack is detected.
- 2) **IP-guard**: Enables IP-guard configuration. Click the **IP-guard List** link to view the host where IP scanning is detected.
- 3) **ICMP-guard**: Enables ICMP-guard configuration. Click the **ICMP-guard List** link to view the host where an ICMP attack is detected.
- 4) **DHCP-guard**: Enables DHCP-guard configuration. Click the **DHCP-guard List** link to view the host where a DHCPv4 attack is detected.
- 5) **DHCPv6-guard**: Enables DHCPv6-guard configuration. Click the **DHCPv6-guard List** link to view the host where a DHCPv6 attack is detected.
- 6) **ND-guard**: Enables ND-guard configuration.

## 1.3.3.4.5 ARP

[Dynamic Binding>>Static Binding](#)
[Delete Selected](#)
[Manual Binding](#)
 IP-based:

| <input type="checkbox"/> | IP         | MAC        | Type            | Action                                                |
|--------------------------|------------|------------|-----------------|-------------------------------------------------------|
| <input type="checkbox"/> | [REDACTED] | [REDACTED] | Dynamic Binding | <a href="#">Dynamic Binding&gt;&gt;Static Binding</a> |
| <input type="checkbox"/> | [REDACTED] | [REDACTED] | Local ARP Entry | <a href="#">Dynamic Binding&gt;&gt;Static Binding</a> |

Show No.:  Total Count: 2

[First](#)
[Pre](#)
[1](#)
[Next](#)
[Last](#)

- Dynamic Binding>>Static Binding

- 1) Select one or multiple records from the ARP list.
- 2) Click the **Dynamic Binding>>Static Binding** icon to switch from dynamic binding to static binding in batches.

- Remove static Binding

[Dynamic Binding>>Static Binding](#)
[Delete Selected](#)
[Manual Binding](#)
 IP-based:

| <input type="checkbox"/> | IP         | MAC        | Type            | Action                                                |
|--------------------------|------------|------------|-----------------|-------------------------------------------------------|
| <input type="checkbox"/> | [REDACTED] | [REDACTED] | Dynamic Binding | <a href="#">Dynamic Binding&gt;&gt;Static Binding</a> |
| <input type="checkbox"/> | [REDACTED] | [REDACTED] | Local ARP Entry | <a href="#">Dynamic Binding&gt;&gt;Static Binding</a> |

Show No.:  Total Count: 2

[First](#)
[Pre](#)
[1](#)
[Next](#)
[Last](#)

- 1) Select one or multiple records from the ARP list.
- 2) Click the **Delete Selected** icon to remove static binding in batches.

- Manual Binding

[Dynamic Binding>>Static Binding](#)
[Delete Selected](#)
[Manual Binding](#)
 IP-based:

| <input type="checkbox"/> | IP         | MAC        | Type            | Action                                                |
|--------------------------|------------|------------|-----------------|-------------------------------------------------------|
| <input type="checkbox"/> | [REDACTED] | [REDACTED] | Dynamic Binding | <a href="#">Dynamic Binding&gt;&gt;Static Binding</a> |
| <input type="checkbox"/> | [REDACTED] | [REDACTED] | Local ARP Entry | <a href="#">Dynamic Binding&gt;&gt;Static Binding</a> |

Show No.:  Total Count: 2

[First](#)
[Pre](#)
[1](#)
[Next](#)
[Last](#)

Manual Binding

IP:  \*

MAC:  \*

- 1) Click the **Manual Binding** icon.
- 2) Set the IP address and MAC address.

Click **OK**. The newly bound ARP is displayed in the ARP list after the **Save operation succeeded** message is displayed.

1.3.3.4.6 ACL

When receiving a packet on a port, the input ACL checks whether the packet matches the ACE entry for this port. When the device intends to output a packet through a port, the output ACL checks whether the packet matches the ACE entry for this port.

When there are different filtration rules, multiple rules may be applied simultaneously and only several of them can be applied. If a packet matches an ACE entry, this packet is processed (permitted or denied) according to the action policy defined by this ACE.

ACL Settings

ACL Settings

ACL Time

ACL Apply

ACL List: 1 Add ACL Delete ACL + Add Access Rule × Delete Selected

| NO. | Description | Src IP/Wildcard | Source Port | Access Control | Protocol | Dest IP/Wildcard | Dest Port | Time Period | Status | Action                              |
|-----|-------------|-----------------|-------------|----------------|----------|------------------|-----------|-------------|--------|-------------------------------------|
| 1   |             | Any             |             | Permit         |          |                  |           | All Time    | Active | <span>Edit</span> <span>Move</span> |

Show No.: 10 Total Count:1

⏪ First < Pre 1 Next > Last > 1 GO

● Adding an ACL

ACL List: 1 Add ACL Delete ACL + Add Access Rule × Delete Selected

| NO. | Description | Src IP/Wildcard | Source Port | Access Control | Protocol | Dest IP/Wildcard | Dest Port | Time Period | Status | Action                              |
|-----|-------------|-----------------|-------------|----------------|----------|------------------|-----------|-------------|--------|-------------------------------------|
| 1   |             |                 |             |                |          |                  |           |             | Active | <span>Edit</span> <span>Move</span> |

Show No.: 10 Total Count:1

⏪ First < Pre 1 Next > Last > 1 GO

Add ACL


ACL Type: ☒ Standard ACL (Source-address-based Control)  
☐ Extended ACL (Flow-based Control)  
☐ MAC-based Extended ACL(Flow-based Control)

ACL Name:  \* Please enter letters or numbers in the range of 1-99 and 1300-1900.


Cancel OK

Click **Add ACL** and set the configuration items in the dialog box displayed. Click **OK**. The newly added ACL is displayed in the **ACL List** drop-down list on the left after the **Save operation succeeded** message is displayed.

● Deleting an ACL

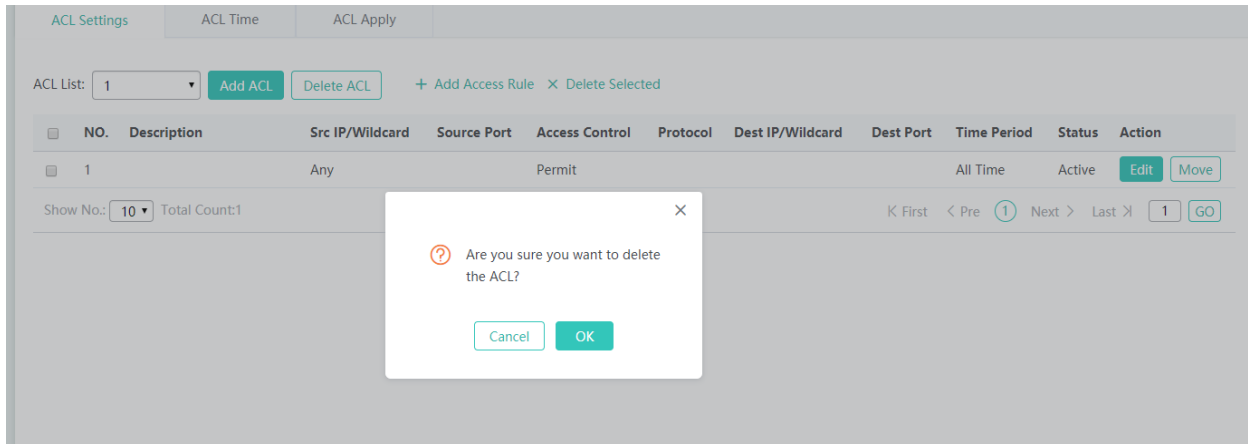

- 1) Select the ACL from the **ACL List** drop-down list.
  - 2) Click **Delete ACL** to finish deleting.
- Adding an access rule

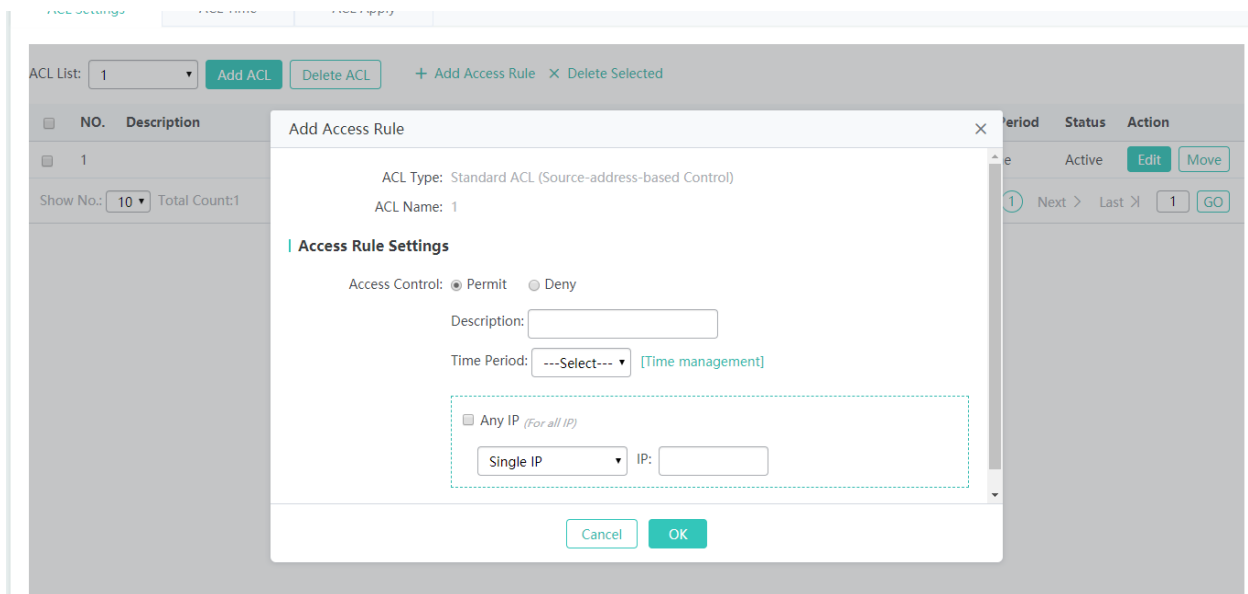

- 1) Click **Add Access Rule**.
  - 2) Set the configuration items in the dialog box displayed.
  - 3) Click **OK**. The newly added access rule is displayed in the access rule list after the Save operation succeeded message is displayed.
- Editing an access rule
- 1) Click the **Edit** button for an access rule in the access rule list.
  - 2) The configuration for the access rule is displayed in the dialog box and the configuration can be edited.
  - 3) Click **OK**. The **Save operation succeeded** message is displayed.

- Deleting an access rule

1) Select one or multiple records from the access rule list.

Click **Delete Selected** and then click **OK** in the displayed dialog box to finish deleting ACL Time

ACLs based on time can be enabled. For example, you can set ACLs to take effect in different time segments for a week, but first a time object must be configured.

## ACL Time

- Adding a time object

Click **Add Time Object**, then set the configuration items in the dialog box displayed, and click **Save**. The newly added time object is displayed in the time object list after the **Save operation succeeded** message is displayed.

- Deleting time objects in batches

Note: The ACL active time must be periodic.

+ Add Time Object

× Delete Selected

| <input type="checkbox"/> Time Object | Day      | Time Period | Action                |
|--------------------------------------|----------|-------------|-----------------------|
| <input type="checkbox"/> test2       | Tuesday  | 16:00-21:58 | <div>EditDelete</div> |
| <input type="checkbox"/> testTune    | Everyday | 0:18-0:58   | <div>EditDelete</div> |

Show No.: 

10

 Total Count:2

K First < Pre 1 Next > Last X 1 GO

- 1) Select one or multiple records from the time object list.
- 2) Click **Delete Selected** and then click **OK** in the dialog box displayed to finish deleting.

- Editing a time object

Edit Time Period

Object Name: test2

Time Period: 

Tuesday16:00-21:58


+ Add

Cancel

Save

- 1) Click the **Edit** button for a time object in the list.
- 2) The configuration about the time object is displayed in the dialog box. Then edit the configuration.
- 3) Click **Save**. The **Save operation succeeded** message is displayed.


- Deleting a time object

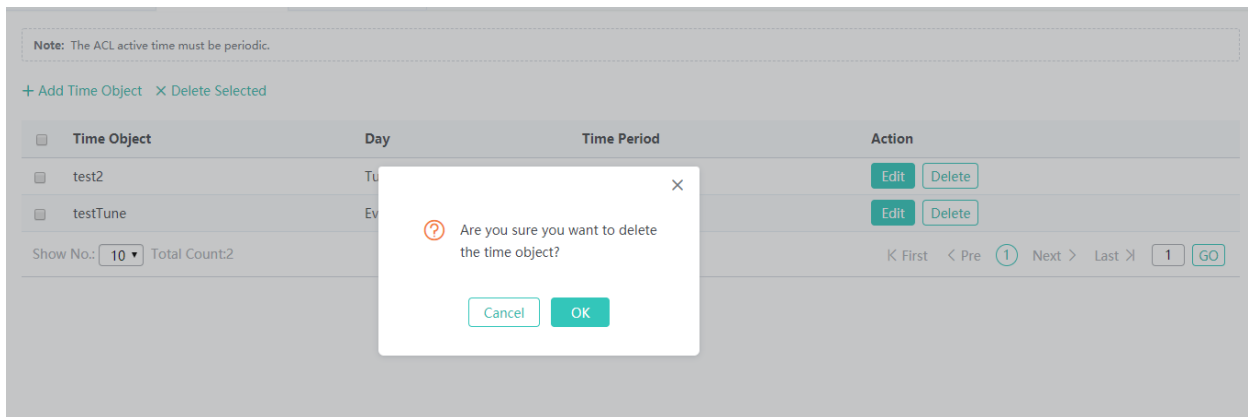

Click the **Delete** button for a time object in the list.


## ACL Application

Apply an ACL to a port or a Wi-Fi to limit user access.

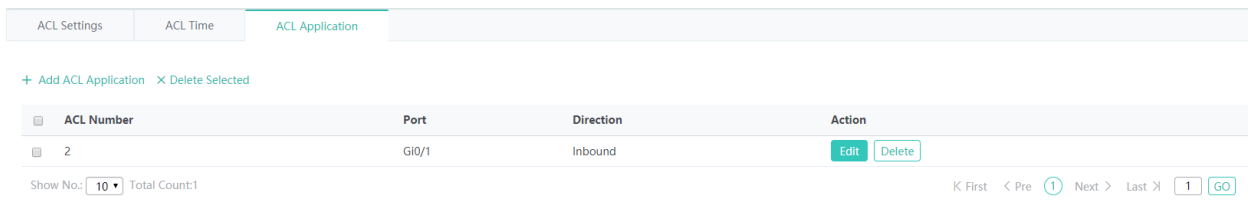


### Adding an ACL application


1. Click [+ Add ACL Application](#).
2. Select ACL number, port and direction in the popup window.
3. Click **Save**. After the message "Configuration succeeded." is displayed, the ACL will appear in the list.

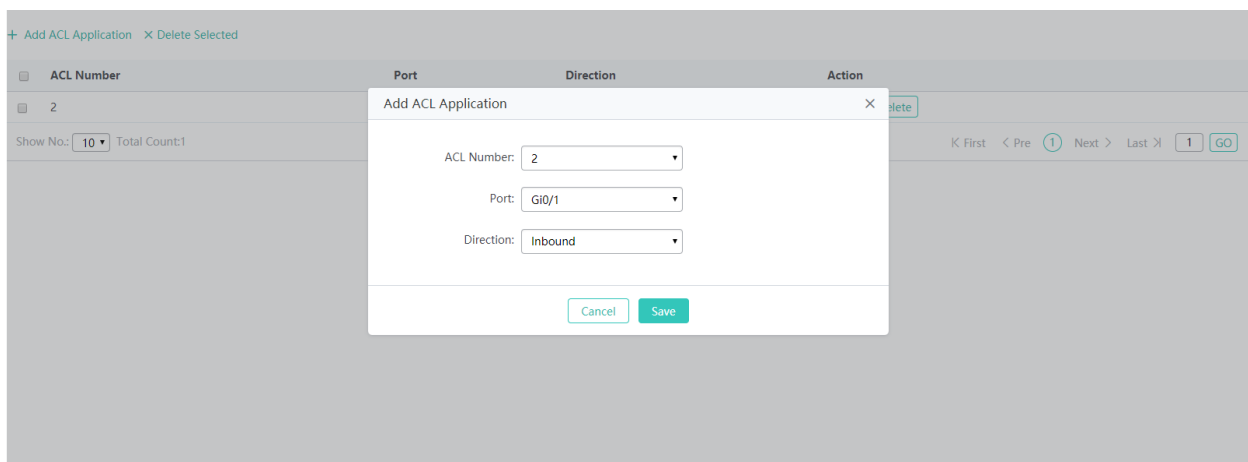

- Deleting selected ACL applications

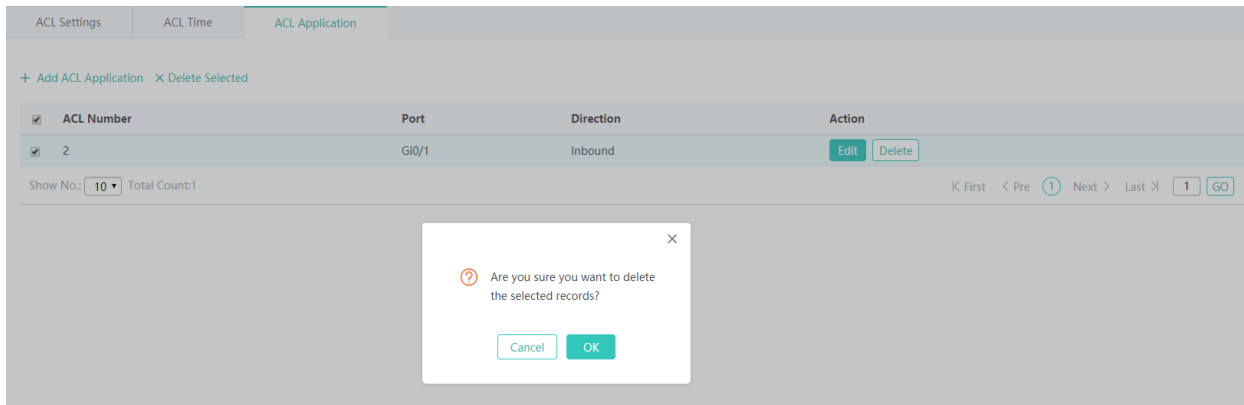

- Editing an ACL application

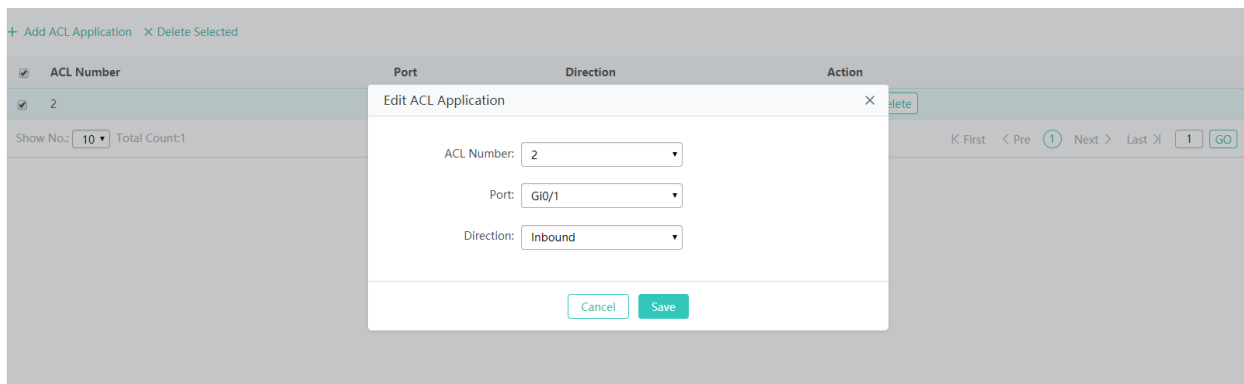

### 1.3.3.5 Authentication

#### 1.3.3.5.1 Web Authentication

Web authentication allows you to control user access to the Internet. The users can perform authentication on the browser without installing any application, which is easy and convenient. Web authentication can be classified into iPortal authentication and ePortal authentication based on the server location.

##### 📌 ePortal Authentication

Unauthenticated users will be redirected to the specified website for authentication. If the Portal is not built into the AC, please select ePortal authentication.

ePortal Authentication
iPortal Authentication

**Note:** Authentication is based on Web to control users' access to the network. It requires no authentication firmware on the client. Instead, you can perform authentication on common browsers.

Eportal Type:
☐ ePortalv1
☒ ePortalv2

Portal Server IP:
\* [Other Server]

Redirection URL:
\*

Portal Key:

Authentication Server:
[Radius Server Settings]

Accounting Server:

SNMP Server:
[SNMP Server]
\*

SSID:
[WIFI/WLAN Settings]

» Advanced Settings

Save
Clear

### iPortal Authentication

Unauthenticated users will be redirected to the specified website for authentication. If the Portal is built into the AC, please select iPortal authentication.

ePortal Authentication
iPortal Authentication

Download Template:
Default

Authentication Package:
☒ Default Package
☐ Custom Package

Authentication Mode:
[Radius Server] [SNMP Server]

iPortal Server Port:
(Range: 1025-65535, Default: 8081)

AD Push Mode:
 No AD

SSID:

» Advanced Settings

Save
Clear

#### 1.3.3.5.2 WeChat Authentication

WeChat Auth is an authentication solution that relieves users from the need of entering usernames and passwords. Besides, it provides an AD space on WeChat for Wi-Fi service providers.

The following two authentication modes are available: WiFi Auth 3.x and WiFi+SMS Auth. (The default is the WeChat template)

**Note:** WeChat Auth is an authentication solution that relieves users from the need of entering usernames and passwords. Besides, it provides an AD space on WeChat for WiFi service providers. The following two Auth modes are available: WiFi Auth 3.x and WiFi+SMS Auth. (The default Auth template is WeChat template)

Auth Server IP:  \*

Auth Server Key:  \*

NAS IP:  \*

Target WiFi:  [WiFi/WLAN Settings]

DNS:  \*

» Advanced Settings

### Choose **Advanced Settings** > **WeChat Auth Advanced Settings**

WeChat Auth-Advanced Settings

**Note:** 'Escape Clients Function' and 'Seamless Auth' need to be configured with 'wechat WiFi authentication' to take effect. Otherwise, the off status is still displayed after refreshing.

Escape Clients Function: ☐ OFF

Seamless Auth: ☐ OFF

### Choose **Advanced Settings** > **Whitelist Settings**.

WeChat Auth Whitelist Settings

Redirection HTTP Port:  (Range: 1-65535) Please use ',' to separate port numbers. You can configure up to 10 port numbers.

MAC Authentication Bypass:  (Configure the Radius server to apply this function to the WiFi configured with dot1x authentication) This is a kind of MAC-based authentication exemption and mainly used for the authentication of devices such as printers.

Anti-jitter Interval: During the interval, authenticated users do not need to pass authentication again. It is active for SSIDs enabled with Web authentication.

Set Anti-jitter Interval For SSID:  to  second(s) (Range: 0-86400, Default: 300)

Escape: ☐ Enable

Kick Inactive Users Off: ☐ Enable

Whitelisted Network Resource: All users(including unauthorized users) can access the server IP address.Up to 50 records can be configured on Web. You can configure more records using CLI commands.

IP:  Mask:

Whitelisted User IP: The user can access the network without authentication. Up to 50 records can be configured on Web. You can configure more records using CLI commands.

IP:  Mask:

Whitelisted MAC: The user can access the Internet without authentication. Up to 50 records can be configured on Web. You can configure more records using CLI commands.

#### 1.3.3.5.3 WiFiDog Authentication

WiFiDog Authentication enables new users to be redirected to the authentication page.

**Note:** WiFiDog authentication enables new users to be redirected to the authentication page

Portal Server IP:  \* [More](#)

Redirection URL:  \*

NAS IP:  \*

Gateway ID:

Redirection Mode:

SSID:  [\[WiFi/WLAN Settings\]](#)

✓ Advanced Settings

Parameter Settings: [\[Advanced Settings\]](#)

Save

Clear

Choose **Advanced Settings > Advanced Settings**.

#### Advanced Settings

Redirection HTTP Port:  (Range: 1-65535) Please use ',' to separate port numbers. You can configure up to 10 port numbers.

MAC Authentication Bypass:  (Configure the Radius server to apply this function to the WiFi configured with dot1x authentication) This is a kind of MAC-based authentication exemption and mainly used for the authentication of devices such as printers.

Anti-jitter Interval: During the interval, authenticated users do not need to pass authentication again. It is active for SSIDs enabled with Web authentication.

Set Anti-jitter Interval For SSID:  to  second(s) (Range: 0-86400, Default: 300)

Escape: ☐ Enable

Kick Inactive Users Off: ☐ Enable

Whitelisted Network Resource: All users(including unauthorized users) can access the server IP address.Up to 50 records can be configured on Web. You can configure more records using CLI commands.

IP:  Mask:  × [+Add](#)

Whitelisted User IP: The user can access the network without authentication. Up to 50 records can be configured on Web. You can configure more records using CLI commands.

IP:  Mask:  × [+Add](#)

Whitelisted MAC: The user can access the Internet without authentication. Up to 50 records can be configured on Web. You can configure more records using CLI commands.

Advanced Settings provide some optional features applicable to both Web authentication V1 and Web authentication V2.


### 1.3.3.6 Optimization

#### 1.3.3.6.1 RF Navigation



Your AP might not support this function. The menu may vary with the device.

Configure the navigation mode and type of the efficient RF navigation to optimize RF performance.

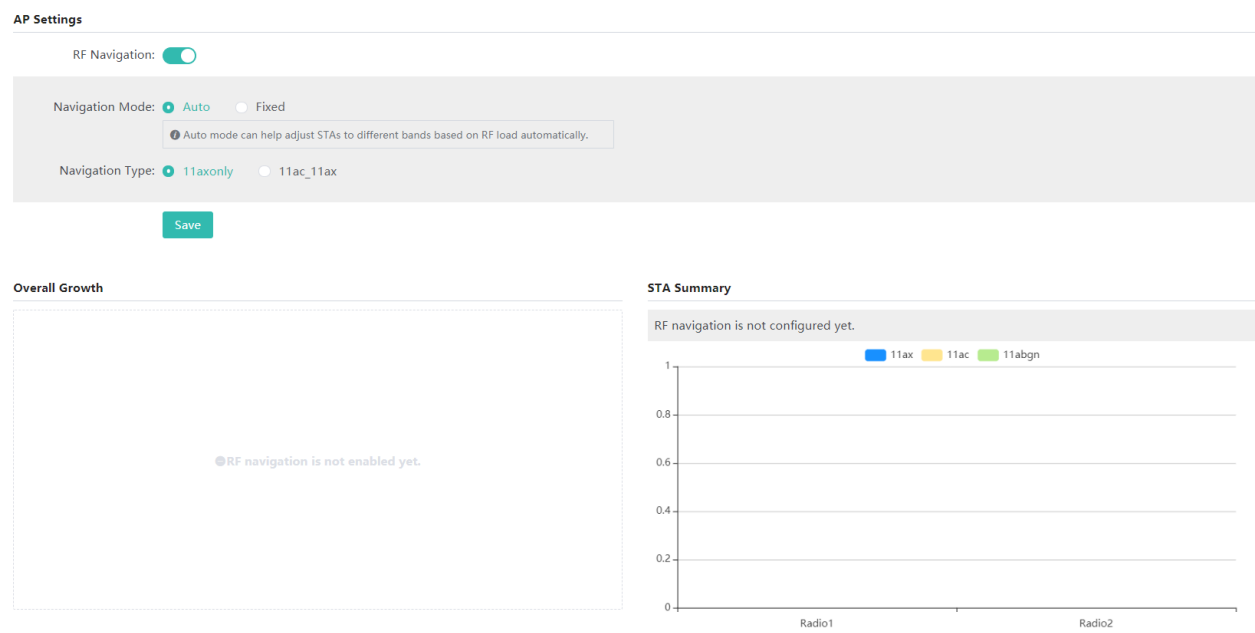

Navigation Mode

There are two navigation modes: auto and fixed. In auto mode, the AP can automatically steer stations (STAs) to different bands based on the RF load during operation. In fixed mode, the AP steers high-performance STAs to designated bands during operation regardless of RF environment differences.

Navigation Type

You can enable 802.11ax only, or enable both 802.11ac and 802.11ax.

1.3.3.7 Solution

1.3.3.7.1 E-bag Optimization

 Your AP might not support this function. The menu may vary with the device.

This function is mainly applicable to the E-bag solution for schools. Balanced optimization ensures a smooth network experience and avoids disconnection when a user uses the E-bag application.

 [E-bag Optimization](#)

Ebag Optimization

Monitoring

Group Access

**Note:** Optimization aims to optimize the network performance based on the network environment test in the E-bag scenario.

SSID 1:  [+ WiFi Settings](#)

Online Clients:  \* (Range: 1- 1552 )

Max 5G Clients:  \* (Range: 0- 1024 ) [Click to learn more](#)

Save

Advanced Settings

Click **Click to learn more**, and the following page will appear.

Ebag Optimization

Monitoring

Group Access

**Note:** Optimization aims to optimize the network performance based on the network environment test in the E-bag scenario.

SSID 1:  [+ WiFi Settings](#)

Online Clients:  \* (Range: 1- 1536 )

Max 5G Clients:

Save

Advanced

5G Clients

**Note:** The operation will disable the 2.4GHz radio and enable the 5GHz radio. If the STA does not support 5GHz, it will go offline. Please click Associate and associate all available STAs.  
**Note:** Each radio supports up to 1024 5GHz clients.

Select 5GHz SSID:  [WiFi Settings](#) [Associate](#)

2.4GHz Clients: 0 5GHz Clients: 0



Select an SSID, and click **Associate** to enable all 5G clients in the classroom to connect to this SSID. The maximum number of 5G clients will be calculated automatically.

[Ebag Optimization](#) [Monitoring](#) [Group Access](#)

**Note:** Optimization aims to optimize the network performance based on the network environment test in the E-bag scenario.

SSID 1:  [+ WiFi Settings](#)

Online Clients:  \* (Range: 1- 1552 )

Max 5G Clients:  \* (Range: 0- 1024 ) [Click to learn more](#)


[Save](#) [Advanced Settings](#)

Enter the maximum number of 5G clients here, and click **Save**. E-bag optimization settings will take effect.


You can click **Advanced Settings** to configure advanced settings. If you perform E-bag optimization again, the advanced settings will be overridden.

## Monitoring

This function allows you to monitor the network performance after E-bag settings are applied.

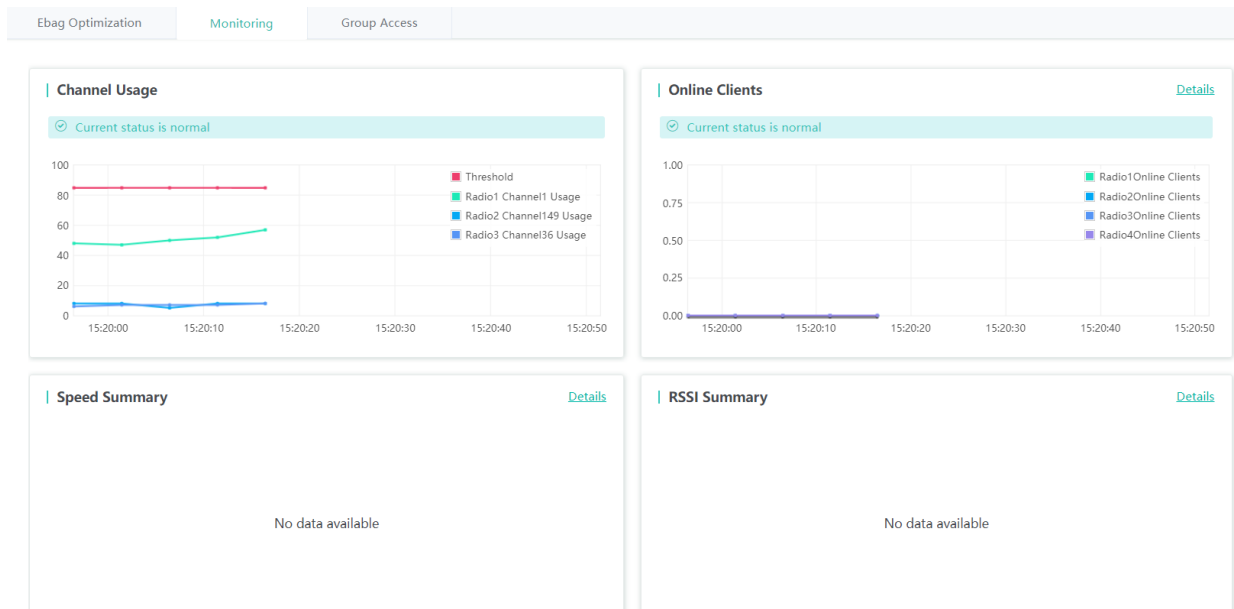


## Group Access

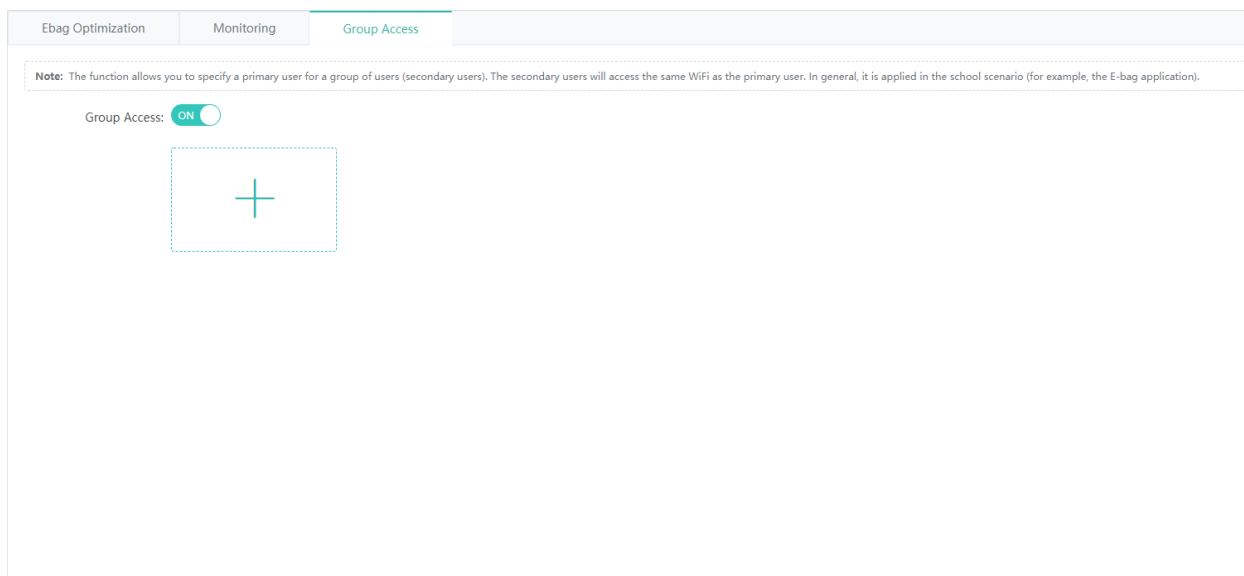


Toggle the **Group Access:** **ON** button to enable or disable the Group Access function.

- Adding a user group

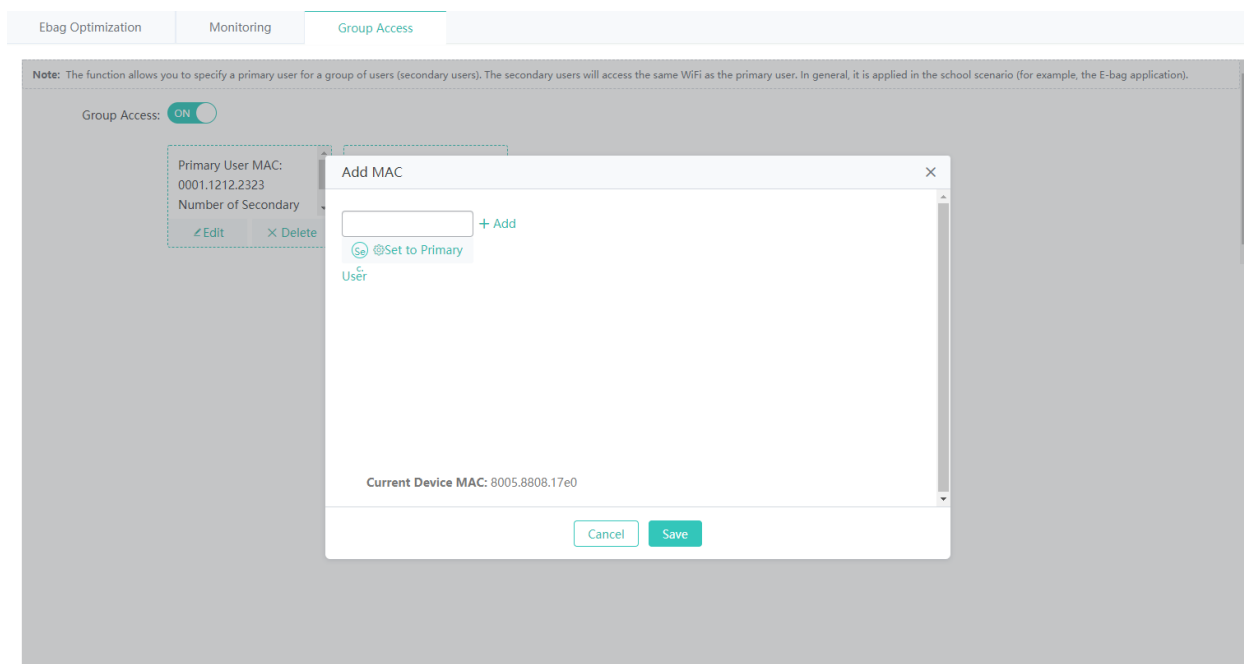


1. Click +.
2. On the **Add MAC** page, enter a MAC address.
3. Click **Save**, and the "Add succeeded." message appears.

- Deleting a user group

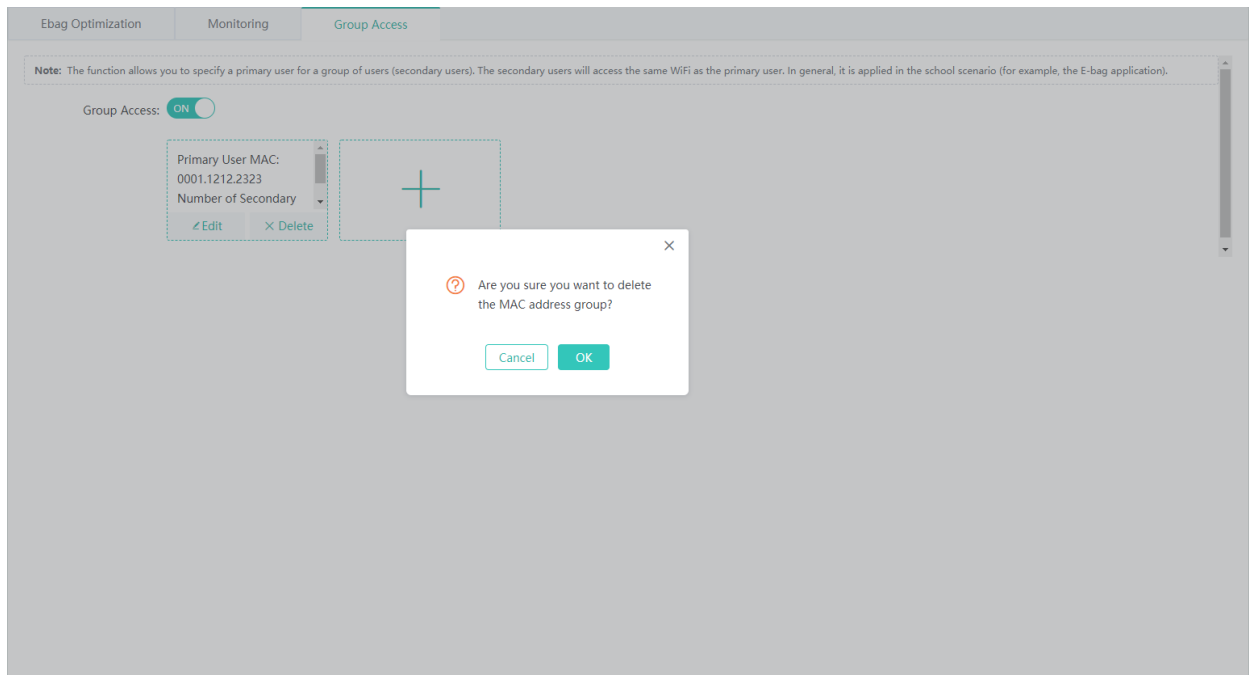

1. Click **Delete**.
2. In the deletion confirmation box, click **OK**.
3. The "Delete succeeded." message appears, indicating that the MAC address is deleted.

- Editing a user group

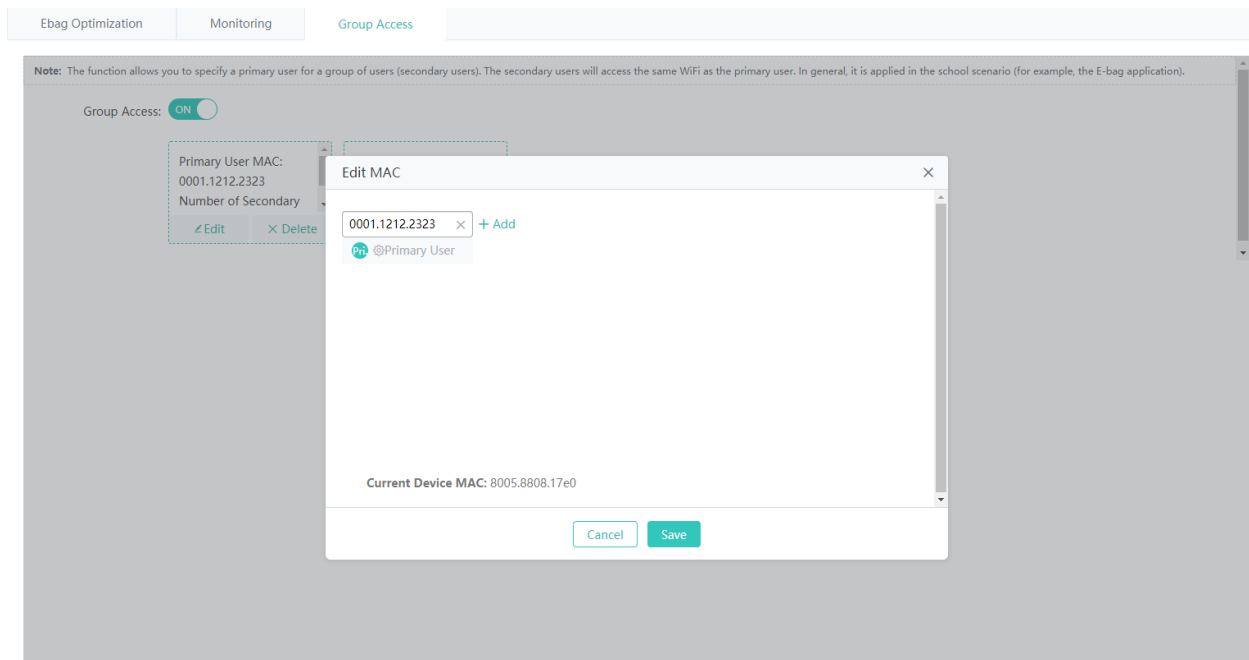

1. Click **Edit**.

2. On the **Edit MAC** page, edit the MAC address.
3. Click **Save**, and the "Edit succeeded." message appears.

### 1.3.3.8 Advanced

#### 1.3.3.8.1 Unicast/Multicast

Unicast refers to a one-to-one transmission from one point in the network to another point; that is, one sender and one receiver, each identified by a network address.

Multicast is group communication where information is addressed to a group of destination computers simultaneously. Multicast can be one-to-many or many-to-many distribution. Multicast should not be confused with physical layer point-to-multipoint communication.

**Simple Multicast:** It is used to broadcast learning in classroom situations. PCs for students and teachers are in the same broadcast domain. Multicast packets are sent in the broadcast domain without the need to cross over different devices and segments.

**Standard Multicast:** It is applied in school-wide broadcast in colleges that have their own multicast video servers.

Communication Mode: ☐ Broadcast ☒ Multicast ☐ Unicast

Dynamic Aging Time(s):  Range: 1-65535, Default: 260. 65535 indicates no aging.

Ignore Query Timer: ☐ Enable

Query Interval(s):  Range: 1-18000, Default: 60

Response Time(s):  Range: 1-25, Default: 10

Proxy Server: ☐ IP:

VLAN-based Multicast: ☐ All

☐ Vid=1 ☐ Vid=10

Multicast-to-Unicast Conversion: ☐ OFF

**Save**

Set parameters as required, and then click **Save**.

#### 1.3.3.8.2 Antenna

The antenna is divided into internal and external, and can generate directional or omnidirectional radiation patterns. Whether antenna type switchover and orientation switchover are supported depends on the radio capacity, which is displayed on the page.

**Note:** The antenna is divided into internal and external, and can generate directional or omnidirectional radiation patterns. A directional antenna is an antenna which radiates or receives greater power in specific directions allowing increased performance and reduced interference from unwanted sources. [Click to view diagram.](#)

Radio:

Antenna Type: ☒ Internal ☐ External This radio does not support switching the type.

Orientation: ☒ Omni-directional ☐ Directional This radio does not support switching the orientation.

**Save**

## 1.3.4 Diagnosis

### 1.3.4.1 Detection Tools

#### 1.3.4.1.1 Network Diagnosis

##### Connectivity Test

When the network malfunctions, you can test the network connectivity to facilitate troubleshooting.

| Connectivity Test                                                | Ping | Tracert |
|------------------------------------------------------------------|------|---------|
| <input checked="" type="checkbox"/> Port Status                  |      | Normal  |
| <input checked="" type="checkbox"/> WiFi Configuration Detection |      | Normal  |
| <input checked="" type="checkbox"/> Network Connection Status    |      | Normal  |

[Test Again](#)

##### Port Status

The system detects whether an interface of the AC is in the up state.

##### AC-AP Connection Status

The system detects whether an AP is online on the AC.

##### Internet Connection Status

The system detects whether the AC is reachable to an external network by pinging 114.114.114.114, or pinging 8.8.8.8 if the AC is deployed abroad.

##### Ping

| Connectivity Test                                        | Ping | Tracert |
|----------------------------------------------------------|------|---------|
| Dest IP/Domain Name: <input type="text"/>                |      |         |
| <a href="#">Advanced Settings</a>                        |      |         |
| Source IP: <input type="text"/>                          |      |         |
| Timeout Interval(s): <input type="text"/> Range: 1-10    |      |         |
| Repeat Times: <input type="text"/> Range: 1-100          |      |         |
| Packet Size(Bytes): <input type="text"/> Range: 36-18024 |      |         |
| Fragment: <input checked="" type="checkbox"/> Enable     |      |         |
| <a href="#">Test</a> <a href="#">Stop</a>                |      |         |

##### Dest IP/Domain Name

Indicates the address or domain name to be pinged.

**Source IP**

Indicates the source address.

**Timeout Interval(s)**

Indicates the timeout interval.

**Repeat Times**

Indicates the number of data packets to be transmitted.

**Packet Size (Bytes)**

Indicates the length of the data padding section in a data packet to be transmitted.

**Fragment**

Indicates the DF flag bit of an IP address. When the DF flag bit is set to **1**, data packets are not fragmented. The DF flag bit is **0** by default.

 **Tracert**

| Connectivity Test                                                                                                                                                                                                                                                                                                                                                                          | Ping | Tracert |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|---------|
| <div>Dest IP/Domain Name: <input type="text"/> *</div> <div>-----  Advanced Settings -----</div> <div>Source IP: <input type="text"/></div> <div>Timeout Interval(s): <input type="text" value="2"/></div> <div><input type="button" value="Test"/> <input type="button" value="Stop"/></div> <div></div> |      |         |

**Dest IP/Domain Name**

Indicates the Tracert destination address or domain name address.

**Source IP**

Indicates the source address.

**Timeout Interval(s)**

Indicates the timeout interval.

### 1.3.4.2 One-Click Collection


**Note:** One-Click Collection is used to collect fault information for troubleshooting.

One-Click Collection

### 1.3.4.3 Syslog

#### 1.3.4.3.1 Syslog

Syslog helps technical support to locate problems.

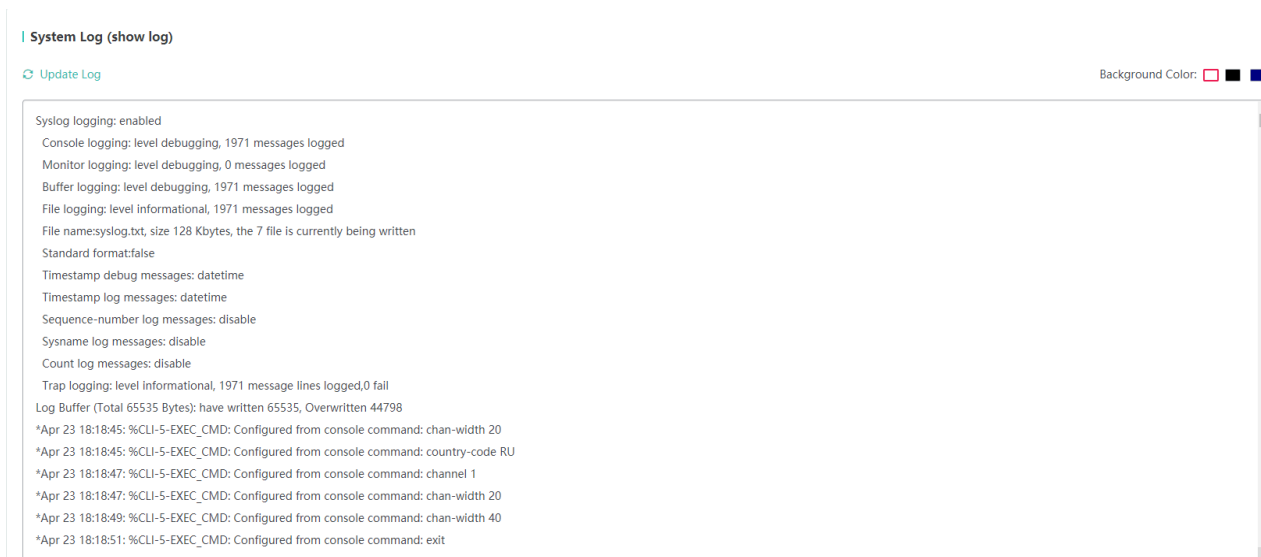

### 1.3.4.4 WIDS

#### 1.3.4.4.1 Rogue AP

Rogue APs pose threat to the network security.

The following containment modes are available.

SSID mode: Contain APs emitting the same Wi-Fi signals as the local AP.

Containment Mode: 

Contain APs with the same

Refresh Every One Minute

Clear Rogue AP

SSID-based: 

Search

| SSID          | MAC | Channel | Rate(Mbps) | RSSI |
|---------------|-----|---------|------------|------|
| No Data Found |     |         |            |      |

Show No.: 

10

 Total Count:0 

First

Pre

Next

Last

1

GO

AdHoc mode: Contain AdHoc devices simulating the same Wi-Fi signals.

Containment Mode: 

Contain APs with signals s

Refresh Every One Minute

Clear Rogue AP

SSID-based: 

Search

| SSID          | MAC | Channel | Rate(Mbps) | RSSI |
|---------------|-----|---------|------------|------|
| No Data Found |     |         |            |      |

Show No.: 

10

 Total Count:0 

First

Pre

Next

Last

1

GO

Rogue mode: Contain APs according to RSSI.

Containment Mode: 

Contain APs with RSSI high

Refresh Every One Minute

Clear Rogue AP

SSID-based: 

Search

| SSID          | MAC | Channel | Rate(Mbps) | RSSI |
|---------------|-----|---------|------------|------|
| No Data Found |     |         |            |      |

Show No.: 

10

 Total Count:0 

First

Pre

Next

Last

1

GO

CONFIG mode: Contain APs by configuring the MAC address and the SSID blacklist manually.

Containment Mode: 

Contain APs added manually

Refresh Every One Minute

Clear Rogue AP

SSID-based:

Search

| SSID          | MAC | Channel | Rate(Mbps) | RSSI |
|---------------|-----|---------|------------|------|
| No Data Found |     |         |            |      |

Show No.: 

10

Total Count:0

< First

< Pre

Next >

Last >

1

GO

1.3.5 Maintenance

1.3.5.1 Settings

1.3.5.1.1 Local Upgrade

Download the main program or Web package to the local device and perform local upgrade.

**Note:** Please download the corresponding firmware version from the official website, and then upgrade the device with the following tips.

**Tips:** 1. Make sure that the firmware version (main program or Web package) matches the device model. 2. The page may have no response during upgrade. Please do not power off or restart the device until an upgrade succeeded message is displayed.

Device Version

Download Firmware: [Check for Later Version & Download](#)

File Name:

Browse

Upgrade

Cancel

Click to select the main program or Web package to be upgraded.

You can click **Cancel** to terminate an ongoing upgrade.

Click the **DNS Server** and **Route** links to check network connection.

1.3.5.1.2 Restart

Conveniently restart the system with a click.

**Note:** Click 'Restart' to restart the device. Please wait a few minutes and the page will be refreshed after restart.

Restart

Click **Restart** to restart the device.

### 1.3.5.1.3 Backup & Restore

#### Backup

Back up the configuration file on the device. You can export current settings for batch operation.

Backup

Restore

**Note:** Please don't close or update the page during import, or import will fail. If you want to apply the new settings, please restart the device on this page, or the settings will not take effect.

File Name:

Browse

Import

Export Current Settings

Export black-white-list-config

#### Restore

After you restore the device to factory settings, please use the default IP address to access Eweb.

Backup

Restore

**Note:** After the device is reset to the factory default settings, all settings will be cleared. Please [Export Current Settings](#) before resetting the device.

Restore Factory Settings

Display Current Settings

### 1.3.5.1.4 System Time

The network device system clock records the time of events on the device. For example, the time shown in system logs is obtained from the system clock. Time is recorded in the format of *year-month-day, hour:minute:second*, day of the week.

When you use a network device for the first time, set its system clock to the current date and time manually.

Set the system time based on the region for the device.

Current Time: **1970-1-14-15:28:45**

Reset Time:  

Time Zone:

Time Synchronization: ☐ Automatically synchronize with an Internet time server **(Please set DNS Server first, otherwise the system time will not be synchronized.)**

Save

### 1.3.5.1.5 System Mode


Two types of APs are available: Fat Access Points and Fit Access Points.

A FAT AP is suitable for family and small-scaled networks and provides full features. Generally, one device can implement access, authentication, routing, VPN, address translation, and even the firewall functions.

A FIT AP is suitable for large-scale wireless network deployment. A dedicated wireless controller is needed to provide unified management. A FIT-AP can be used only after the wireless controller delivers configurations and it cannot complete configuration by itself.

Select the AP mode.

Current Mode: **Fat AP Mode**

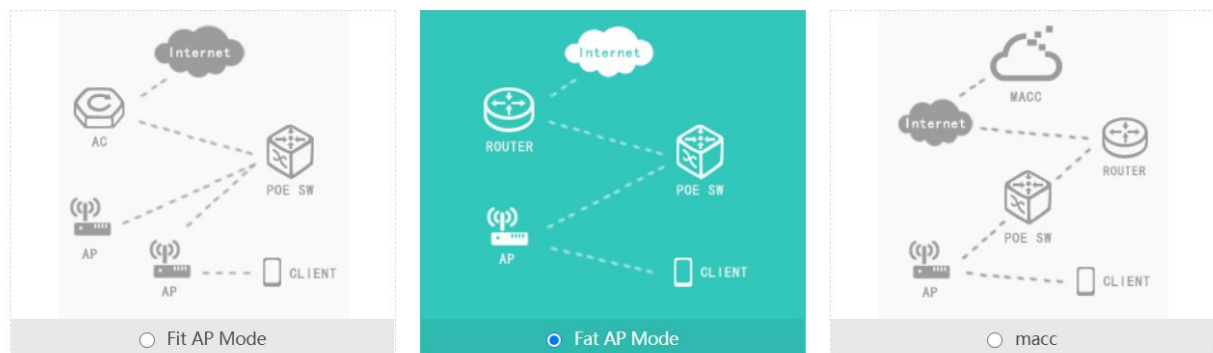

Note: The device restarts after mode switch. Please wait for a minute.

### 1.3.5.1.6 Log Server

The device sends local logs to the server for storage. History logs are stored for ease of query.

**Server Logging** can be set to **ON/OFF** to enable/disable the server log function.

**Note:** Local logs are sent to the corresponding server in order of priority level. Higher the level is, sooner the log is sent. The highest level is level 0 and the lowest is 7.

Local Logging: ☒ ON

Server IP:

Logging Level:

Save

### 1.3.5.1.7 Device DNS

Domain names can be dynamically parsed only after a DNS server is configured.

DNS Server 1:  +

DNS Server 2:  ×

Save

## 1.3.5.2 System

### 1.3.5.2.1 Web Management

#### Admin Password

To enhance the system security and information interaction security, you need to change the default password of the system.

On the **Admin Password** tab page, enter the old password, new password, and confirm password, and click **Save**.

## Admin Password

## Basic Settings

## Permissions

Username: admin

Old Password:

\*

New Password:

\*

Confirm Password:

\*

Save

## Basic Settings

Configure the device location to better inspect devices and facilitate device management. Set the timeout time. When you do not perform operations on the system for long, the Web-based system automatically exits to ensure your system security.

Web Access Port: Indicates the access port. It needs to be added when you access the Web-based system from a browser.

Login Timeout: Indicates the timeout time.

Device Location: Indicates the device location. Setting this parameter facilitates management.

## Admin Password

## Basic Settings

## Permissions

Web Access Port:

\* (Range: 80,1025-65535)

Login Timeout:



Device Location:

Access Redirection: ☐ HTTP Redirection to HTTPS*In NAT scenario, redirection may cause HTTP access failure.*

Save

## Permissions

A system may have multiple users of different levels that correspond to different permissions. You can set or view permissions through the **Permission Settings** page. The system has two default users: user **admin**

Admin Password Basic Settings Permissions

+ Add Admin

| Username      | Action |
|---------------|--------|
| No Data Found |        |

Show No.: 10 Total Count: 0

< First < Pre Next > Last > 1 GO

- Adding an administrator

+ Add Admin

Username

Show No.: 10 Total Count: 0

next > Last > 1 GO

Add Admin

Username: \*

New Password: \*

Confirm Password: \*

Permission: ☒ All Pages

Cancel

Save

Click **Add Administrator**. A dialog box is displayed, as shown in the preceding figure. Set the configuration items in the dialog box, and click **Save**. The newly added administrator is displayed in the list after the **Save succeeded** message is displayed.

- Editing administrator information

+ Add Admin

Username

Show No.: 10 Total Count: 0

next > Last > 1 GO

Edit Administrator

Username: \*

Change Password: ☐

Permission: ☒ All Pages

Cancel

Save

- 1) Click the **Edit** button for an administrator in the list.

- 2) A dialog box is displayed, as shown in the preceding figure. The configuration about the administrator is displayed in the dialog box. Then edit the configuration.
  - 3) Click **Save**. The **Save operation succeeded** message is displayed.
- Deleting an administrator

[+ Add Admin](#)

| Username                                                | Action                                                                                                                                                                                                             |
|---------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ■                                                       | <input type="button" value="Edit"/> <input type="button" value="Delete"/>                                                                                                                                          |
| Show No.: <input type="text" value="10"/> Total Count:1 | <input type="button" value="First"/> <input type="button" value="Pre"/> <input type="button" value="1"/> <input type="button" value="Next"/> <input type="button" value="Last"/> <input type="button" value="GO"/> |

Click **Delete** to delete an administrator.

### 1.3.5.2.2 Telnet

Enable Telnet and SSH access for security purposes.

**Note:** The password will also be applied to the Console

Telnet Service: ☒ ON

SSH Service: ☐ OFF

New Password:  \*

Confirm Password:  \*

### 1.3.5.2.3 Web Console

The Web console function is similar to the Telnet function and you can configure any command on the console. However, the Web console function does not support commands in shell mode, telnetting to APs, or batch refresh of commands.

Console Output:

Background Color: ☐ ☒ ☐

Ruijie#

Command Input:

Send

Clear Screen

#### 1.3.5.2.4 SNMP

The Simple Network Management Protocol (SNMP) is by far the dominant protocol in network management. This Protocol (SNMP) was designed to be an easily implementable, basic network management tool that could be used to meet network management needs. It is named Simple Network Management Protocol as it is really easy to understand. A key reason for its widespread acceptance, besides being the chief Internet standard for network management, is its relative simplicity. There are different versions of SNMP, such as SNMP V1, SNMP V2c, and SNMP V3.

**Note:** Either SNMPv2 or SNMPv3 is supported

SNMP Version: ☒ v2  ☐ v3 

Device Location:

SNMP Community:  \*

Trap Community:  *The Trap Community must be the same as the SNMP Community.*

Trap Receiver Address:  *\* You can configure up to 10 Trap receivers. Please use ";" or press the Enter key to separate addresses.*

Save

#### 1.3.5.2.5 CWMP/MACC

The CPE WAN Management Protocol (CWMP) is used by a server to manage, configure, and monitor ACs, APs, routers, or switches.

The CWMP enables a device to interconnect to the cloud platform or other servers for management.



Your AP may not support this function and the actual menu items shall prevail. When a device is interconnected to a server over CWMP, a correct DNS server needs to be configured so that the device correctly parses the domain name of the server. Therefore, check whether a correct DNS server is configured.

Click **DNS server** behind **Note** to redirect to the related configuration page.

Set parameters and click **Save**.

**Note:** The server implements the CPE WAN Management Protocol (CWMP) to manage, configure and monitor APs, routers and switches.  
**Note:** DNS server address is required for CWMP server connection. Please check DNS Server settings [\[DNS server\]](#)

CWMP: ☒

Server URL:  \*

Server Username:

Server Password:

Device URL:

Device Username:

Device Password:

CPE Inform Interval(s):  Range: 30-3600

### CWMP

Indicates whether to enable CWMP.

#### Server URL

Indicates the server address.

#### Server Username

Indicates the server username, which can be used for verification.

#### Server Password

Indicates the server password, which can be used for verification.

#### Device URL

Indicates the device URL, which can be used for active connection within the server LAN.

#### Device Username

Indicates the device username, which can be used for verification.

#### Device Password

Indicates the device password, which can be used for verification.

#### CPE Inform Interval(s)

Indicates the interval for connecting to the server, that is, heartbeat packet interval. Other Functions

## 1.3.6 Others


### 1.3.6.1 Favorites

After you add frequently configured functions to favorites, you can click menu items in the favorites and configure the functions rapidly next time.

 Currently, a maximum of ten menu items can be added to favorites.


- Adding to favorites

Select a required menu and drag it to **Favorites**.

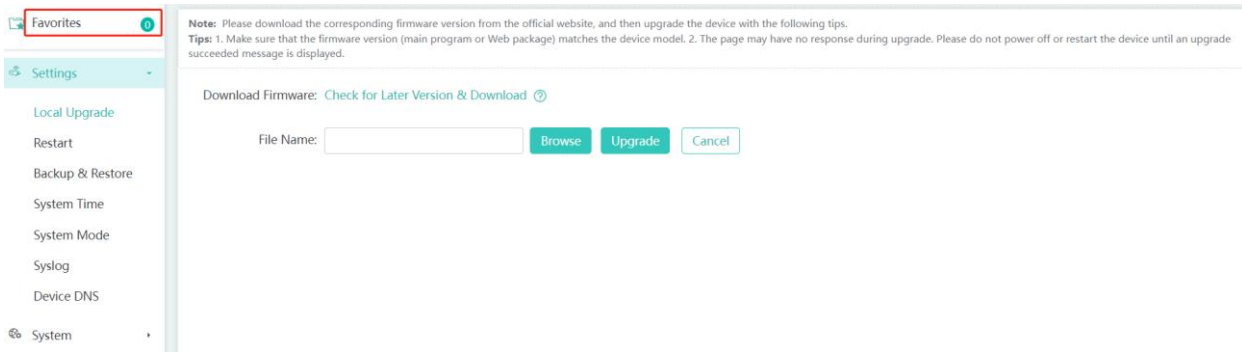

- Canceling favorites

Click **Favorites** to display the favorites list. Select a menu item from the list and click the **X** icon. Confirm the delete operation to delete the menu item from the favorites.

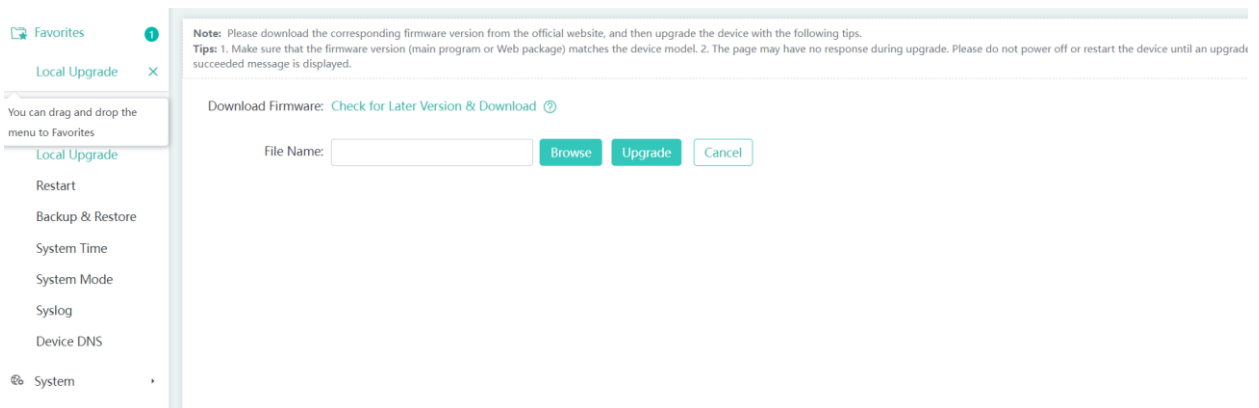

### 1.3.6.2 Fast Query Menu


There are increasing functions in the system. The fast query menu helps users rapidly search for required functions. Enter a search condition in the search box on the home page. A list of records meeting the search condition is rapidly displayed. Click a function to redirect to the function page.



### 1.3.6.3 More Functions


- Displaying the current account

The current account is displayed in the upper right corner of the home page. The current account is **admin**, as shown in the figure below.

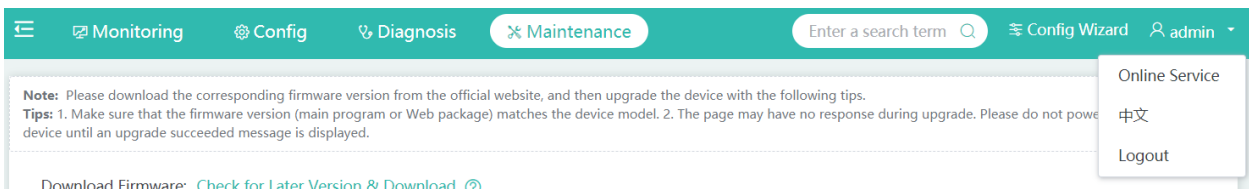


- Online Service

Click the current account icon in the upper right corner. A function drop-down list is displayed. Click **Online Service** when you need to seek help.

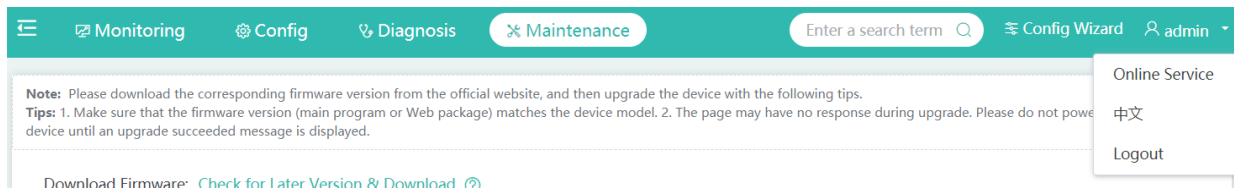

- Language switching


Click the current account icon in the upper right corner. A function drop-down list is displayed. The second item is used for language switching. If the system is in Chinese, click **English** to switch to the English edition; if the system is in English, click **中文** to switch to the Chinese edition.

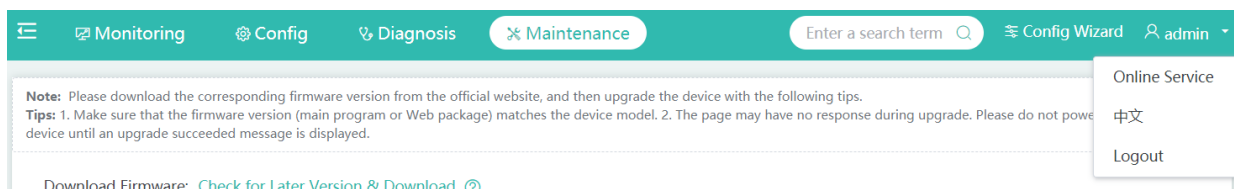

The language switching item is displayed based on actual requirements. If only Chinese is supported, this item is not displayed. It is displayed only when both Chinese and English are supported.

- Exiting the system

Click the current account icon in the upper right corner. A function drop-down list is displayed. Click **Logout** and click **OK** to exit the system.

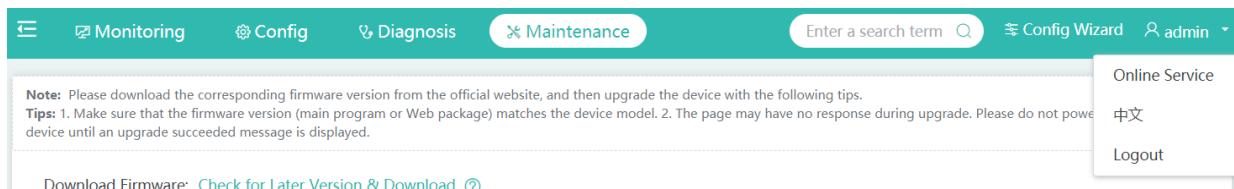

## 1.4 Fit AP-Eweb


### 1.4.1 SmartAP

SmartAP allows you to deploy APs in mobile office scenario. Click **Config Wizard** to end the SmartAP configuration page, including **System Mode**, **Network Configuration** and **Change Web NMS Password**. If APs are not applied to mobile office scenario, only system mode will be displayed.

#### 1. System Mode

Click **Change** and the **System Mode** window is displayed. You can select a mode among three modes available: Fit AP, Fat AP and MACC.

Current Mode: Fit AP Mode

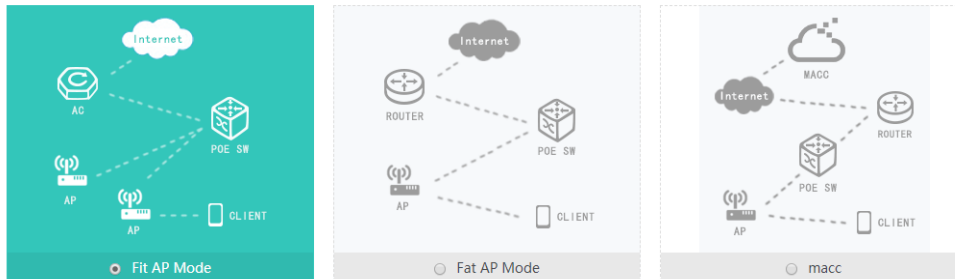

Note: The device restarts after mode switch. Please wait for a minute.

## 2. Network Configuration

IP Allocation Type:

SSID:

Hide: ☐ Enable

Active AC IP:

Standby AC IP:

L2TP Tunnel: ☒ ON

HQ IP:   \* (Peer ip address for l2tp tunnel)

Access AC Through ☒ Yes ☐ No

Tunnel:

[Advanced Settings](#)

## 3. Change Web NMS Password

Old Password:

New Password:

Confirm Password:

## 1.5 Enabling the Web Server

The Web service is enabled for an AP device when this AP is delivered. By default, the IP address is 192.168.110.1. The following describes how to enable Web service on the CLI when it is disabled.

| Configuration              | Commands                                 |                                                                                                    |
|----------------------------|------------------------------------------|----------------------------------------------------------------------------------------------------|
| Configuring the Web server | <b>enable service web-server</b>         | Enables the Web service.                                                                           |
|                            | <b>ip address</b>                        | (Optional) Configures the IP address.                                                              |
|                            | <b>webmaster level username password</b> | (Optional) Configures the username and password for logging in to the Web-based management system. |

## Configuration Method

### ✚ Enabling the Web Service

- Mandatory configuration.
- This configuration is performed on the AP device.

### ✚ Configuring the IP Address

- Optional configuration.

### ✚ Configuring the Username and Password for Logging in to the Web-Based Management System

- Optional configuration.
- When the Web service is enabled, the administrator username/passwords (admin/admin) and guest user/passwords (guest/guest) are created by default. The passwords of these two accounts can be changed. In addition, you can create other Web-based management accounts.

## Verification

Log in to the Web page by using the preset IP address and Web-based management account and password, then check whether the login is successful.

## Relevant Commands

### ✚ Enabling the Web Service

|                              |                                                                                                                                                                                                                                                             |
|------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Command</b>               | <b>enable service web-server [ http   https   all ]</b>                                                                                                                                                                                                     |
| <b>Parameter Description</b> | <b>http   https   all:</b> Enables corresponding services. <b>http</b> enables the HTTP service, <b>https</b> enables the HTTPS service, and <b>all</b> enables both the HTTP and HTTPS services. By default, both the HTTP and HTTPS services are enabled. |
| <b>Command Mode</b>          | Global configuration mode.                                                                                                                                                                                                                                  |

### ✚ Configuring the IP Address

|                              |                                                                |
|------------------------------|----------------------------------------------------------------|
| <b>Command</b>               | <b>ip address</b> <i>ip-address ip-mask</i>                    |
| <b>Parameter Description</b> | <i>ip-address:</i> IP address<br><i>ip-mask:</i> network mask. |

|                     |                               |
|---------------------|-------------------------------|
| <b>Command Mode</b> | Interface configuration mode. |
|---------------------|-------------------------------|

### ✎ Configuring the Account and Password for Logging in to the Web-Based Management System

|                              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Command</b>               | <b>webmaster level</b> <i>privilege-level</i> <b>username</b> <i>name</i> <b>password</b> { <i>password</i>   [ <b>0</b>   <b>7</b> ] <i>encrypted-password</i>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Parameter Description</b> | <p><i>privilege-level</i>: indicates the level of the permission bound to the user. Three levels are available, which are 0, 1, and 2. The super administrator account (admin) created by default corresponds to level 0, a guest account (guest) corresponds to level 2, and other accounts correspond to level 1.</p> <p><i>name</i>: address of the static RP.</p> <p><i>password</i>: The ACL is used to limit the group address range of the static RP service. The default range is all group services.</p> <p><b>0</b>   <b>7</b>: password encryption type. <b>0</b> indicates no encryption, and <b>7</b> indicates simple encryption. The default value is 0.</p> <p><i>encrypted-password</i>: password.</p> |
| <b>Command Mode</b>          | Global configuration mode.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Usage Guide</b>           | N/A                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |

## Configuration Example

### ✎ Configuring the Web Server

|                            |                                                                                                                                                                                                                                                                                               |
|----------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Configuration Steps</b> | <p>Enable the Web service.</p> <p>Configure the local username and password.</p> <p>Configure the device management IP address. The default management VLAN is VLAN 1.</p> <p>Configure an IP address for VLAN 1. Ensure that the management IP address can be pinged from the user's PC.</p> |
|                            | <pre>Ruijie# configure terminal Ruijie(config)# enable service web-server Ruijie(config)# webmaster level 0 username admin password admin Ruijie(config)#interface vlan 1 Ruijie(config-if-VLAN 1)#ip address 192.168.1.200 255.255.255.0 Ruijie(config)# end</pre>                           |
| <b>Verification</b>        | Run the <b>show running-config</b> command to display related configuration commands.                                                                                                                                                                                                         |
|                            | <pre>Ruijie(config)#show running-config Building configuration... Current configuration: 6312 bytes  ! hostname ruijie</pre>                                                                                                                                                                  |


```
!  
!  
webmaster level 0 username admin password 7 08022b181b29  
webmaster level 1 username manager password 7 06073f  
webmaster level 2 username guest password 7 14155f083206  
http update mode auto-detect  
!  
!  
interface VLAN 1  
  ip address 192.168.1.200 255.255.255.0  
  no shutdown  
!  
line con 0  
line vty 0 4  
  login  
!  
!  
End
```

## 1.6 Configuration Examples

### 1.6.1 Constructing a WLAN for the DHCP Server on the AP Device

The AP is regarded as a wireless router and constructs a small-scale network as a fat AP. The DHCP server is configured on the AP device. The following figure shows the topology.

Figure 1-3 Topology 1 (AP is in routing mode)

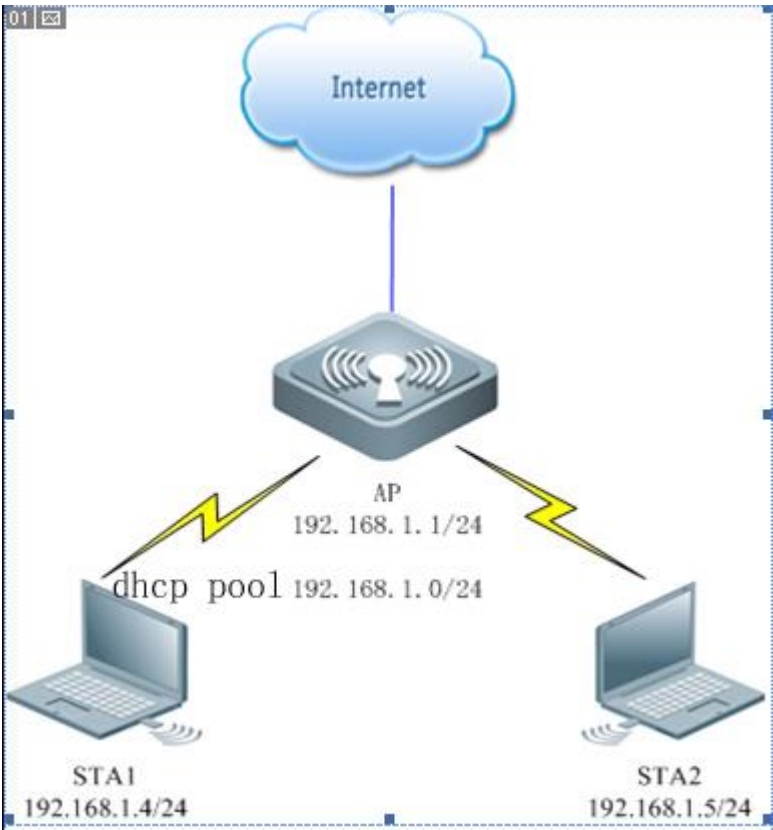



| Configuration                                        | Description and Command                                                     |                                                        |
|------------------------------------------------------|-----------------------------------------------------------------------------|--------------------------------------------------------|
| Construction of a WLAN for the DHCP server on the AP | <div><div></div><div>Mandatory. It is used to configure a WLAN.</div></div> |                                                        |
|                                                      | Wi-Fi name                                                                  | Associates internet access wireless signals for an STA |
|                                                      | Wi-Fi password                                                              | An STA inputs the password for internet access.        |
|                                                      | DHCP configuration                                                          | Allocates IP addresses to wireless STAs.               |

Verification

➤ Select AP working mode and set the Internet connection type

Config Wizard—External Network Settings

  
☐ Bridge Mode  
DHCP in others devices

  
☒ NAT Mode  
DHCP in AP

Port:  (If you want to change the port, please go to device configuration.)

IP Allocation Mode:

IP:  \*

IP Mask:  \*

Default Gateway:  \*


NAT: ☐ Check this box if you want to convert all internal addresses to external addresses.


Note: This function is designed for ease of use based on user scenario. It is recommended to configure the function via Web instead of CLI. Aggregate port configuration is not supported.

Next

- The AP works in wireless routing mode.
- You can select the following Internet connection types when the AP works in wireless routing mode.
- Static IP (dedicated IP)

Config Wizard—External Network Settings

  
☐ Bridge Mode  
DHCP in others devices

  
☒ NAT Mode  
DHCP in AP

Port:  (If you want to change the port, please go to device configuration.)

IP Allocation Mode:

IP:  \*

IP Mask:  \*

Default Gateway:  \*

NAT: ☒ Check this box if you want to convert all internal addresses to external addresses.

Next

- PPPoE (ADSL line)

Config Wizard—External Network Settings

  
☐ Bridge Mode  
DHCP in others devices

  
☒ NAT Mode  
DHCP in AP

Port:  (If you want to change the port, please go to device configuration.)

IP Allocation Mode:

Account:

Password:

PPPOE IP: Not Obtained

NAT: ☒ Check this box if you want to convert all internal addresses to external addresses.

Note: This function is designed for ease of use based on user scenario. It is recommended to configure the function via Web instead of CLI. Aggregate port configuration is not supported.

Next

- DHCP (dynamic IP)

Config Wizard—External Network Settings

  
☐ Bridge Mode

  
☒ NAT Mode

DHCP in others devices

DHCP in AP

Port:  (If you want to change the port, please go to device configuration.)

IP Allocation Mode:

Default Gateway:  Optional

DHCP IP: Not Obtained


NAT: ☒ Check this box if you want to convert all internal addresses to external addresses.

Note: This function is designed for ease of use based on user scenario. It is recommended to configure the function via Web instead of CLI. Aggregate port configuration is not supported.

Next

- **Configure a Wi-Fi name (use a simple name that is easy to remember). A Wi-Fi name contains up to 32 characters.**

Figure 1-4 AP Quick Settings for SSID

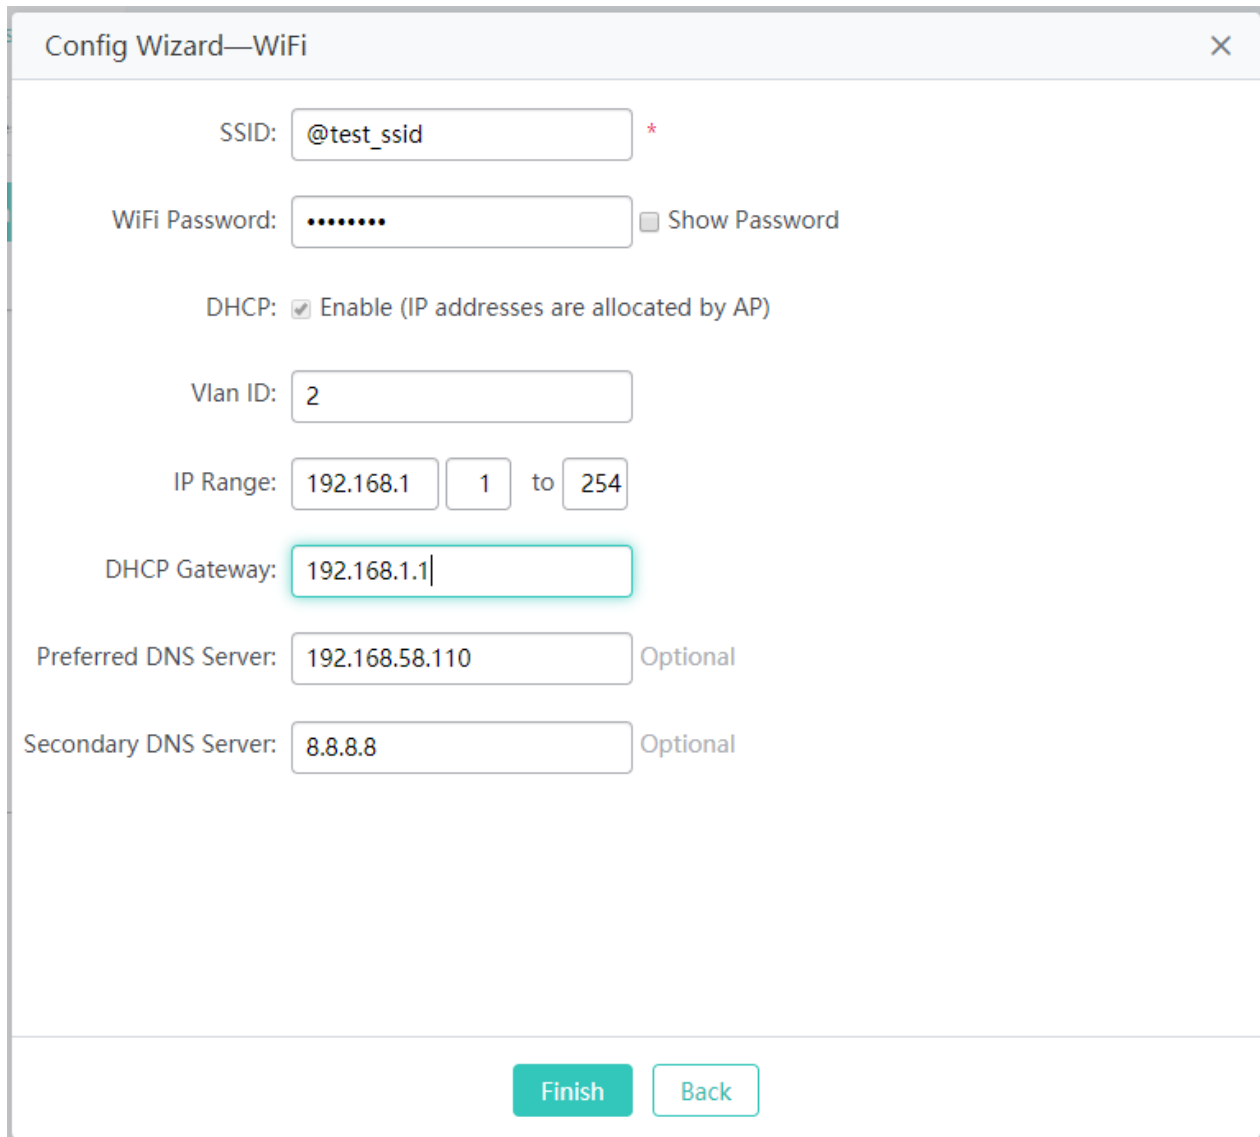

The screenshot shows a web-based configuration window titled "Config Wizard—WiFi". It contains several input fields and checkboxes for configuring a Wi-Fi network. The fields are as follows:

- SSID:** A text box containing "@test\_ssid" with a red asterisk to its right, indicating it is a required field.
- WiFi Password:** A text box with masked characters (dots). To its right is a checkbox labeled "Show Password".
- DHCP:** A checkbox labeled "Enable (IP addresses are allocated by AP)" which is checked.
- Vlan ID:** A text box containing the number "2".
- IP Range:** Three text boxes: the first contains "192.168.1", the second contains "1", and the third contains "254", with the word "to" between the second and third boxes.
- DHCP Gateway:** A text box containing "192.168.1.1".
- Preferred DNS Server:** A text box containing "192.168.58.110" with the word "Optional" to its right.
- Secondary DNS Server:** A text box containing "8.8.8.8" with the word "Optional" to its right.

At the bottom of the window, there are two buttons: "Finish" and "Back".

➤ **Security configuration**

By default, the WPA2-PSK mode is selected. A password consists of 8 to 64 characters and can be a combination of letters, digits, and special characters.

Figure 1-5 AP Quick Settings for Security

Config Wizard—WiFi

×

SSID: @test\_ssid \*

WiFi Password: ..... ☐ Show Password

DHCP: ☒ Enable (IP addresses are allocated by AP)

Vlan ID: 2

IP Range: 192.168.1 1 to 254

DHCP Gateway: 192.168.1.1

Preferred DNS Server: 192.168.58.110 Optional

Secondary DNS Server: 8.8.8.8 Optional

Finish

Back

## ➤ DHCP configuration

Figure 1-6 AP Quick Settings for DHCP

The screenshot shows the 'Config Wizard—WiFi' window. The 'DHCP' section is checked and labeled 'Enable (IP addresses are allocated by AP)'. Below this, a red box highlights the following fields:

- Vlan ID: 2
- IP Range: 192.168.1 to 254
- DHCP Gateway: 192.168.1.1
- Preferred DNS Server: 192.168.58.110 (Optional)
- Secondary DNS Server: 8.8.8.8 (Optional)

At the bottom of the window are 'Finish' and 'Back' buttons.

- IP address range: 192.168.1.0/24 to 192.168.1.254/24.
- DNS server: 192.168.58.110 (Perform configuration based on actual conditions.)
- Click **Finish**.

## Verification

- Associate an STA with Wi-Fi: Eweb\_AAAA1 and obtain the IP address 192.168.1.4.
- Verify that the STA can connect to the Wi-Fi and then visit the Web through 192.168.1.1.

 If the management IP address is changed, use the new management IP address to use the Web again.